UMW SP3485EN

3.3V power supply,up to 256 nodes,12Mbps half-duplex RS485/RS422 transceiver

1.Description

The SP3485EN is a 3.3V powered, half-duplex, low-power RS-485 transceiver that fully meets the requirements of the TIA/EIA-485 standard. The SP3485EN includes a driver and a receiver, both of which can be independently enabled and disabled. When both are disabled, both the driver and the receiver output a high impedance state. The SP3485EN has a 1/8 load that allows 256 SP3485EN transceivers to be connected to the same communication bus. Errorfree data transfer of up to 12Mbps is possible. The SP3485EN operates from a voltage range of 3.0 to 3.6V and features fail-safe, over temperature protection,current limit protection,over-voltage protection, and other functions.

2.Features

- 3.3V power supply, half-duplex
- 1/8 unit load allows up to 256 devices on the bus
- Driver output short-circuit protection function
- Over temperature protection function
- Low power shutdown function
- Receiver open circuit protection function
- Strong anti-noise ability
- Integrated transient voltage resistance function
- Transmission rate up to 12Mbps in an electrical noise environment

3.Pinning Information

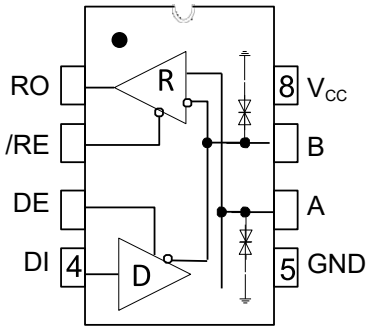

SOP-8/TSSOP-8

Pin Descriptions

Pin Number	Pin Name	Description
1	RO	Receiver output When /RE is low level: if A-B ≥ 200mV, RO = high if A-B ≤ -200mV, RO = low
2	/RE	Receiver output enable control, When /RE is low level, receiver output is enabled and RO output is available. When /RE is high level, receiver output is disabled, and RO is in high impedance state. When /RE is high level and DE is low level, the device enters low power consumption mode.
3	DE	Driver output enable control When DE is high level, driver output is available; when DE is low level, the output is in high impedance state. When /RE is high level and DE is low level, the device enters low power consumption mode.
4	DI	Driver input, When DE is high level, the DI low level forces the non-inverting driver output A low and inverting driver output B high; The DI high level forces the non-inverting driver output A high and inverting driver output B low.
5	GND	Ground
6	A	Non-inverting receiver input and non-inverting driver output
7	B	Inverting receiver input and inverting driver output
8	V_{CC}	Power supply

4.Limiting Values

Parameter	Symbol	Value	Units
Supply voltage	V_{CC}	7	V
Voltage of control port	/RE, DE, DI	-0.3 to 7	V
Bus side input voltage	A, B	-7 to 13	V
Receiver output voltage	RO	-0.3 to 7	V
Operating temperature range		-40 to 105	°C
Storage temperature range		-60 to 150	°C
Welding temperature		300	°C
Continuous power dissipation	SOP8	400	mW

The maximum limit parameter value means that exceeding these values may cause irreversible damage to the device. Under these conditions, it is not conducive to the normal operation of the device. Continuous operation of the device under the maximum allowable rating may affect the reliability of the device. The reference point of all voltages is ground.

5.Driver Electrical Characteristics

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Differential output voltage (no load)	V_{OD1}			3.3		V
Differential output voltage	V_{OD2}	Figure 2, R_L=54Ω	1.5		V_{CC}	V
		Figure 2, R_L=100Ω	2		V_{CC}	V
Change in magnitude of differential output voltage (NOTE1)	ΔV_{OD}	Figure 2, R_L=54Ω			0.2	V
Common mode output voltage	V_{OC}	Figure 2, R_L=54Ω			3	V
Change in magnitude of common mode output voltage (NOTE1)	ΔV_{OC}	Figure 2, R_L=54Ω			0.2	V
Input high voltage	V_{IH}	DE, DI, /RE	2			V
Input low voltage	V_{IL}	DE, DI, /RE			0.8	V
Logic input current	I_{IN1}	DE, DI, /RE	-2		2	μA
Output short-circuit current short-circuit to high	I_{OSD1}	Short-circuit to 0V~12V			250	mA
Output short-circuit current short-circuit to low	I_{OSD2}	Short-circuit to -7V~0V	-250			mA
Thermal shutdown threshold				140		°C
Thermal shutdown hysteresis				20		°C

(unless otherwise stated V_{CC}=3.3V±10%, Temp=T_{MIN}~T_{MAX}, typical value is V_{CC}=+3.3V, Temp=25°C)

NOTE1: ΔV_{OD} and ΔV_{OC} are the changes in V_{OD} and V_{OC} amplitude caused by a change of DI state of the input signal.

6.Receiver Electrical Characteristics

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Input current (A, B)	I_{IN2}	DE=0V,V_{CC}=0 or 3.3V,V_{IN}=12V			125	μA
		DE=0V,V_{CC}=0 or 3.3V,V_{IN}=-7V	-100			μA
Positive-going input threshold voltage	V_{IT+}	-7V≤V_{CM}≤12V			+200	mV
Negative-going input threshold voltage	V_{IT-}	-7V≤V_{CM}≤12V	-200			mV
Hysteresis voltage	V_{hys}	-7V≤V_{CM}≤12V	10	30		mV
High level output voltage	V_{OH}	I_{OUT}=-2.5mA, V_{ID}=200mV	V_{CC}-1.5			V
Low level output voltage	V_{OL}	I_{OUT}=2.5mA, V_{ID}=-200mV			0.4	V
Tristate leakage current	I_{OZR}	0.4V<V_O<2.4V			±1	μA
Receiver input resistance	R_{IN}	-7V≤V_{CM}≤12V	96			kΩ
Receiver short-circuit current	I_{OSR}	0V<V_O<V_{CC}	±8		±60	mA

(unless otherwise stated V_{CC}=3.3V±10%, Temp=T_{MIN}~T_{MAX}, typical value is V_{CC}=+3.3V, Temp=25°C)

7.Supply Current

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Supply current	I_{CC1}	/RE=0V, DE=0V		520	800	μA
	I_{CC2}	/RE=V_{CC}, DE=V_{CC}		540	700	μA

8.Driver Switching Characteristics

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Driver differential output delay	t_{DD}	R_{DIFF}=60Ω, C_{L1}=C_{L2}=100pF		10	35	ns
Driver differential output transition time	t_{TD}	(see Fig 3 and Fig 4)		12	25	ns
Driver propagation delay, low-to-high	t_{PLH}	R_{DIFF}=27Ω		8	35	ns
Driver propagation delay, high-to-low	t_{PHL}	(see Fig 3 and Fig 4)		8	35	ns
$\|t_{PLH} - t_{PHL}\|$	t_{PDS}			1	8	ns
Driver enable to output high	t_{PZH}	R_L=110Ω,		20	90	ns
Driver enable to output low	t_{PZL}	(see Fig 5, 6)		20	90	ns
Driver disable time from low	t_{PLZ}	R_L=110Ω,		20	80	ns
Driver disable time from high	t_{PHZ}	(see Fig 5, 6)		20	80	ns
Driver enable from shutdown to output high	t_{DSH}	R_L=110Ω, (see Fig 5, 6)		500	900	ns
Driver enable from shutdown to output low	t_{DSL}	R_L=110Ω, (see Fig 5, 6)		500	900	ns

9.Receiver Switching Characteristics

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Receiver input to output delay (low to high)	t_{RPLH}	C_L=15pF See Fig 7 and Fig 8		80	150	ns
Receiver input to output delay (high to low)	t_{RPHL}			80	150	ns
$\|t_{RPLH} - t_{RPHL}\|$	t_{RPDS}			7	10	ns
Receiver enable to output low	t_{RPZL}	C_L=15pF, See Fig 7 and Fig 8		20	50	ns
Receiver enable to output high	t_{RPZH}	C_L=15pF, See Fig 7 and Fig 8		20	50	ns
Receiver disable time from low	t_{PRLZ}	C_L=15pF, See Fig 7 and Fig 8		20	45	ns
Receiver disable time from high	t_{PRHZ}	C_L=15pF, See Fig 7 and Fig 8		20	45	ns
Receiver enable from shutdown to output high	t_{RPSH}	C_L=15pF, See Fig 7 and Fig 8		200	1400	ns
Receiver enable from shutdown to output low	t_{RPSL}	C_L=15pF, See Fig 7 and Fig 8		200	1400	ns
Time to shutdown	t_{SHDN}	NOTE2	80		300	ns

NOTE2: The device is put into shutdown by bringing RE high and DE low. If the enable inputs are in this state for less than 80ns, the device is guaranteed not to enter shutdown. If the enable inputs are in this state for at least 300ns, the device is guaranteed to have entered shutdown.

10.Function Table

Driver

Control		Input	Output	
/RE	DE	DI	A	B
X	1	1	H	L
X	1	0	L	H
0	0	X	Z	Z
1	0	X	Z (shutdown)	
X: don’t care; Z: high impedance				

Receiver

Control		Input	Output
/RE	DE	A-B	RO
0	X	≥200mV	H
0	X	≤-200mV	L
0	X	Open/short-circuit	H
1	X	X	Z
X: don’t care; Z: high impedance			

11.Test Circuit

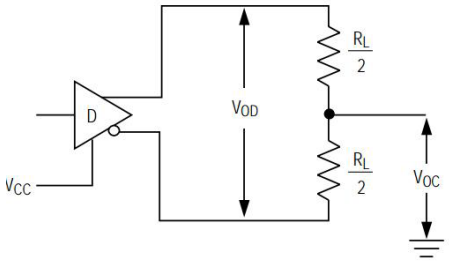

Fig. 2 Driver DC test load

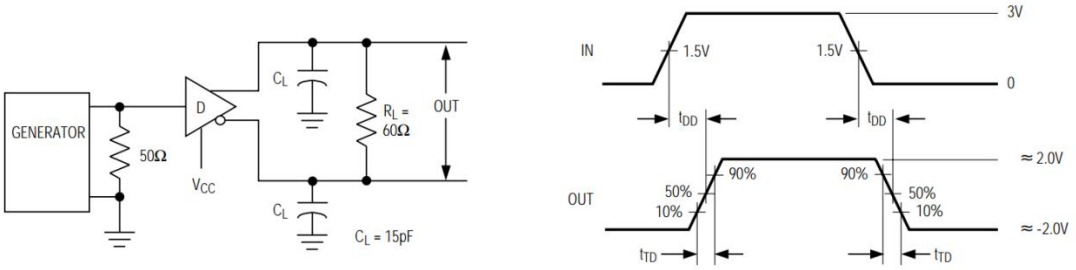

C_L includes probe and stray capacitance (same as below)
Fig. 3 Driver differential output delay and transition times

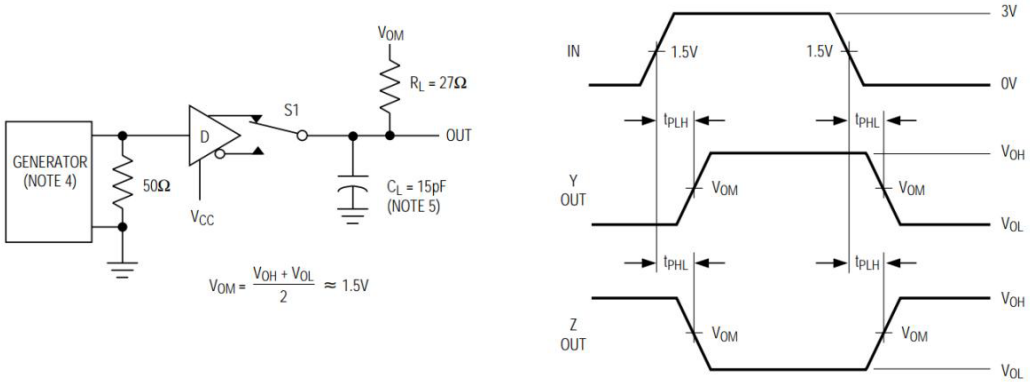

Fig. 4 Driver propagation times

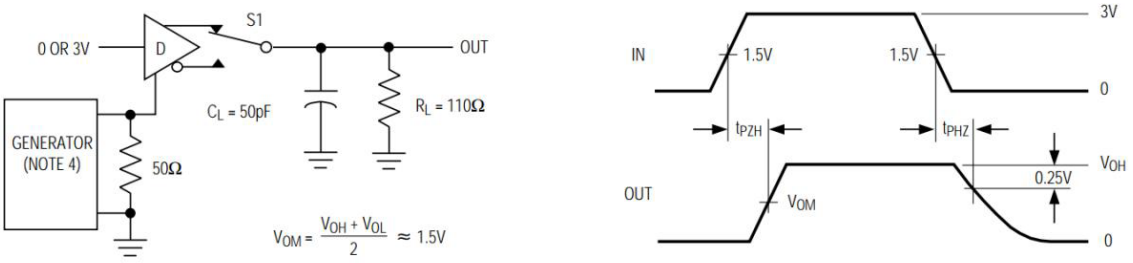

Fig. 5 Driver enable and disable times

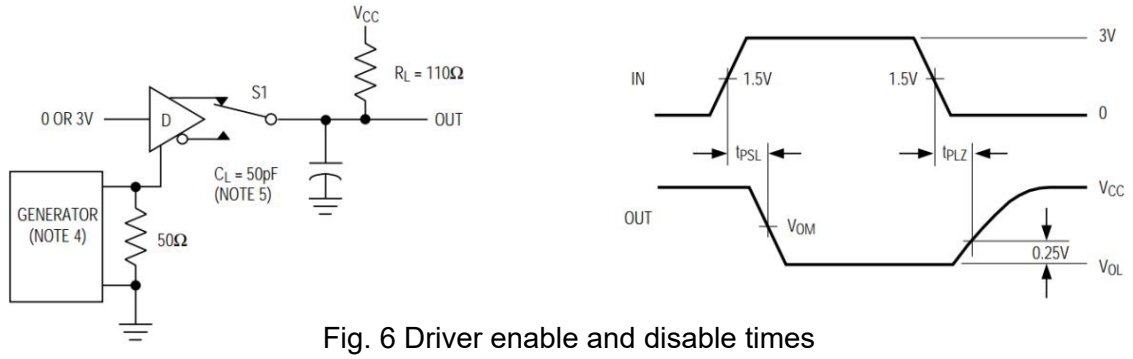

Fig. 6 Driver enable and disable times

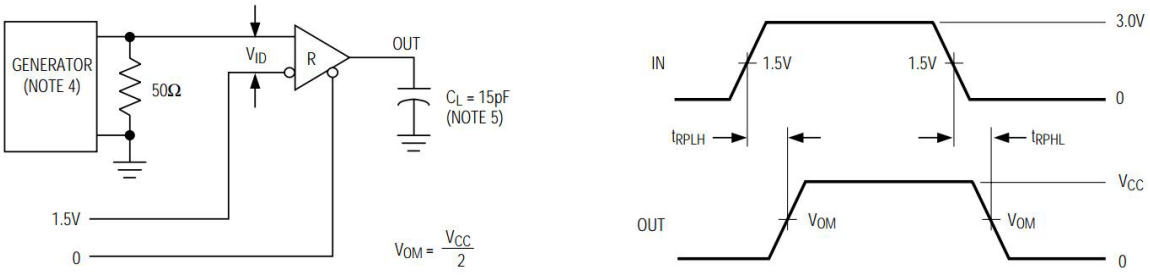

Fig. 7 Receiver propagation delay

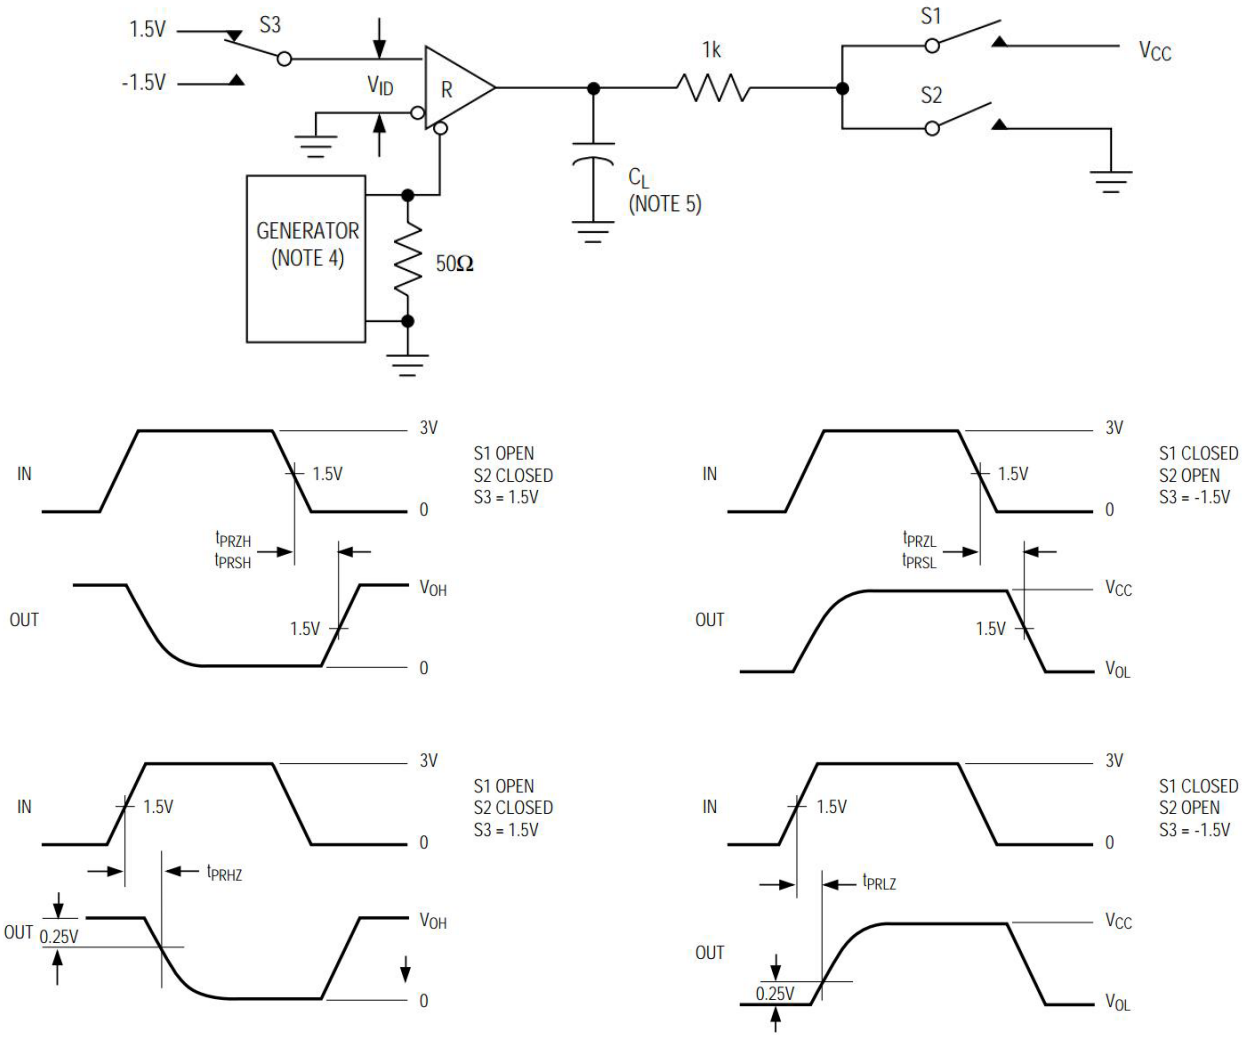

Fig. 8 Receiver enable and disable times

12.General Description

1 Brief description

The SP3485EN is a half-duplex high-speed transceiver for RS-485/RS-422 communication, and includes one driver and one receiver. It has fail-safe, over-voltage protection and over-current protection. The SP3485EN allows error-free data transmission up to 12Mbps.

2 Allowing up to 256 transceivers on the bus

The standard RS-485 receiver has an input impedance of 12kΩ (1 unit load), and the standard driver can drive up to 32 unit loads. The receiver of the SP3485EN transceiver has a 1/8 unit load receiver input impedance (96kΩ), allowing up to 256 transceivers to be connected in parallel on one bus. These devices can be combined arbitrarily, or combined with other RS-485 transceivers, as long as the total load does not exceed 32 units.

3 Driver output protection

Two mechanisms are used to avoid faults or bus collisions that cause excessive output current and excessive power consumption. First, over-current protection provides fast short-circuit protection over the entire common-mode voltage range (refer to the typical operating characteristics). Second, the thermal shutdown circuit forces the driver output into a high-impedance state when the die temperature exceeds 140°C.

4 Typical applications

4.1 Bus networking: The SP3485EN RS485 transceiver is designed for bidirectional data communication on multipoint bus transmission lines. Figure 9 shows a typical network application circuit. These devices can also be used as linear repeaters with cables longer than 4000 feet. In order to reduce reflections, terminal matching should be done at both ends of the transmission line with their characteristic impedance, and the length of the branch wires other than the main line should be as short as possible.

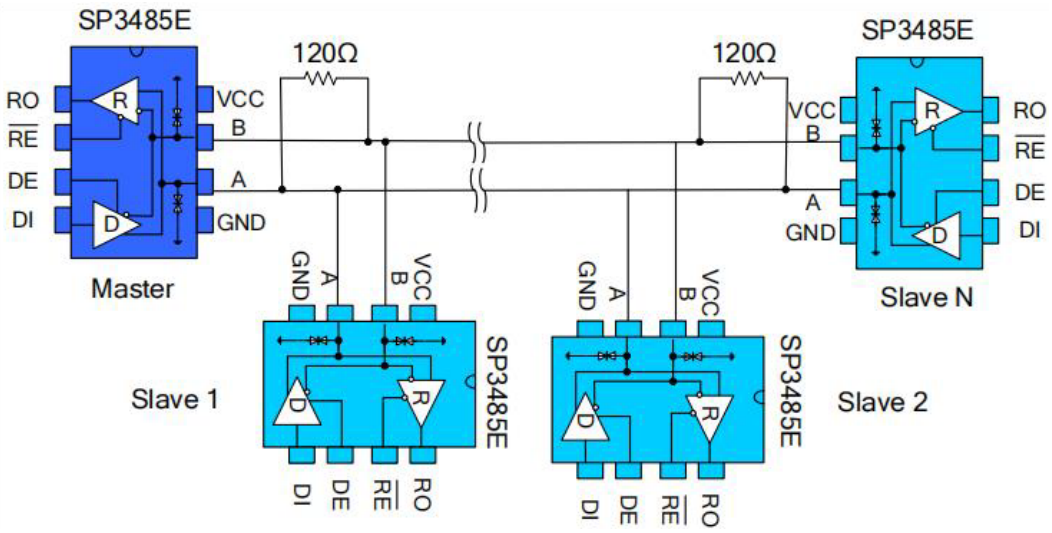

Fig. 9 Bus-type RS485 half-duplex communication network

4.2 Hand-in-hand networking:

Also known as daisy chain topology, it is the standard and specification of RS485 bus wiring, and is the RS485 bus topology recommended by organizations such as TIA. The wiring method is that the master control device and multiple slave devices form a hand-in-hand connection, as shown in Figure 10, the hand-inhand way is to leave no branches. This wiring method has the advantages of low signal reflection and high communication success rate.

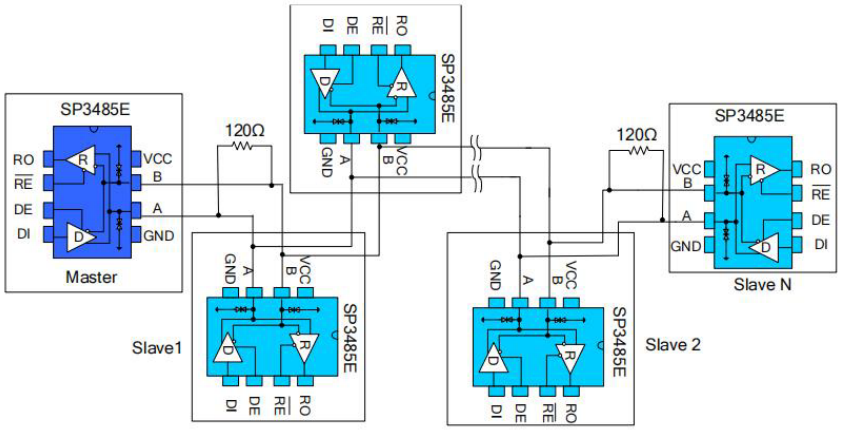

Fig. 10 Hand-in-hand type RS485 half-duplex communication network

4.3 Bus port protection:

In harsh environments, RS485 communication ports are usually protected against static electricity, lightning and surge protection, etc. and it is even necessary to prevent 380V power supply access to avoid damage of smart meters and industrial control hosts. Figure 11 shows 3 common kinds of RS485 bus port protection schemes. The first scheme is to connect the TVS device to the protection ground in parallel with the AB port, the TVS device in parrallel with the AB port, the thermistor in series with the AB port and the gas discharge tube is connected to the protection ground to form a three-level protection scheme. The second scheme is a three-level protection scheme including TVS connected to the ground in parallel with AB, the thermistor in series and the varistor in parallel with AB. The third one includes pull-down resistors connected to the power supply and ground respectively for AB, TVS between AB and the thermistor connected to A or B port.

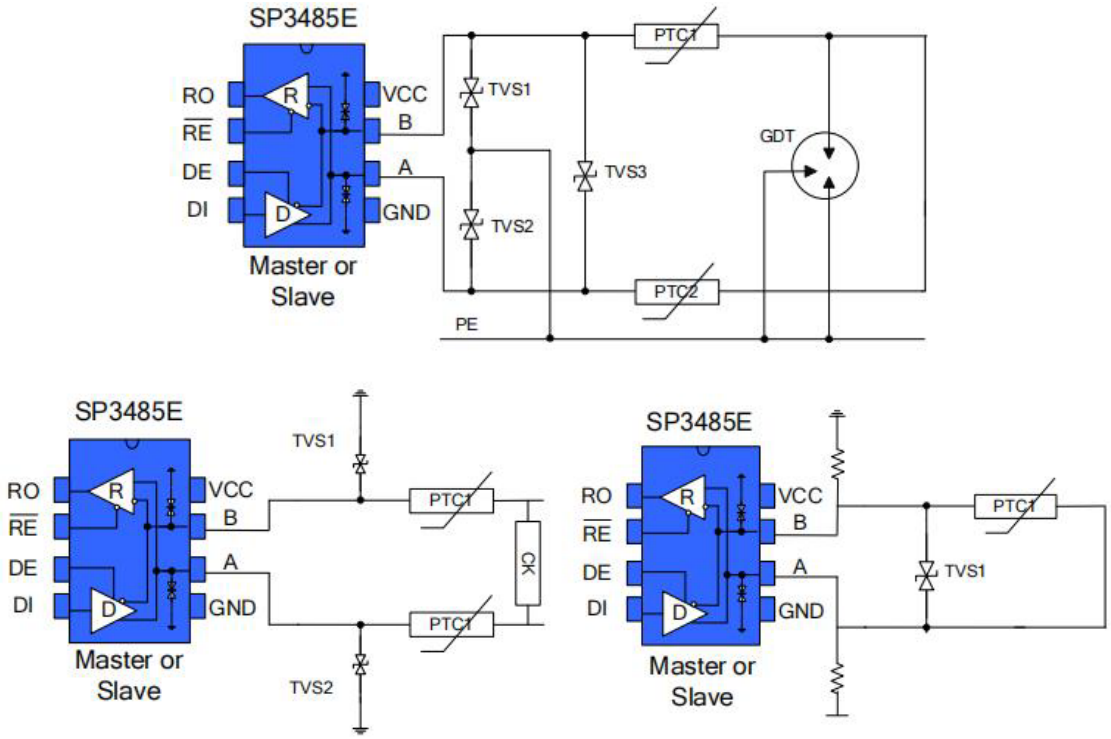

Fig. 11 Port protection scheme

13.1 SOP-8 Package Outline Dimensions

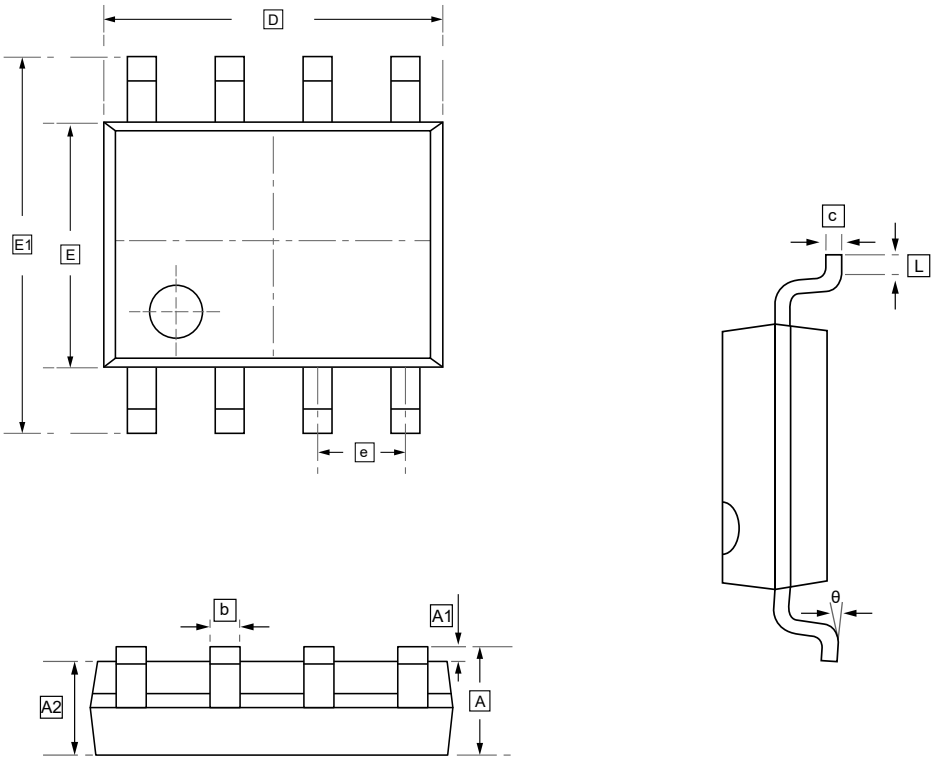

DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	b	c	D	E	E1	e	L	θ
Min	1.350	0.000	1.350	0.330	0.170	4.700	3.800	5.800	1.270	0.400	0°
Max	1.750	0.100	1.550	0.510	0.250	5.100	4.000	6.200	BSC	1.270	8°

13.2 TSSOP-8 Package Outline Dimensions

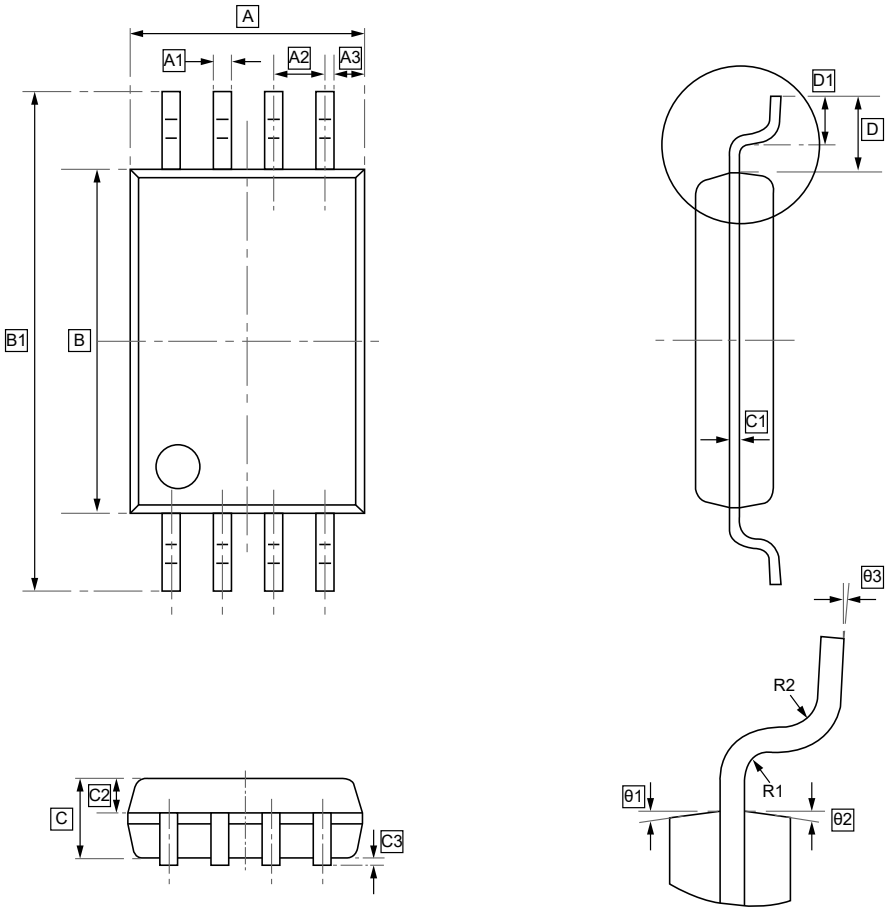

DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	A3	B	B1	C	C1	C2	C3	D	D1
Min	2.90	0.20	0.65	0.36	4.30	6.30	0.95	0.127	0.39	0.05	1.00	0.50
Max	3.10	0.30	TYP	0.46	4.50	6.50	1.05	TYP	0.49	0.15	REF	0.70

Symbol	R1	R2	θ1	θ2	θ3
Min	0.15	0.15	12°	12°	0°
Max	TYP	TYP	TYP4	TYP4	7°

14.Ordering Information



yww: Batch Code

Order Code	Package	Base QTY	Delivery Mode
UMW SP3485EN	SOP-8	2500	Tape and reel

15.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.