

1. Description

XC6219 series is a high precision, low noise and fast response low dropout linear voltage regulator manufactured by CMOS process. This series of voltage regulators has built-in fixed reference voltage, error correction circuit, current limiting circuit, phase compensation circuit and MOSFET with low internal resistance, which achieves high ripple suppression, low output noise and quick response to low dropout.

3. Features


- High precision output voltage: 2.5%
- Selectable output voltage: 1.5V~5.0V
- Very low static current (Typ.=2μA)
- Very low turn-off current (Typ.=0.1μA)
- Good input stability: Typ.=0.2%/V
- Strong carrying capacity: when $V_{in}=4.3V$

2. Product Usage


- Smart phone/mobile phone
- Digital camera/video camera
- Battery powered equipment
- Bluetooth and other RF products
- Portable consumer equipment

- and $V_{out}=3.3V, I_{out}=300mA$
- Built-in overcurrent protection and load short circuit protection;
- Compatible ceramic capacitor;
- Package form: SOT89-5, SOT23-5

4. Pinning information



SOT23-5

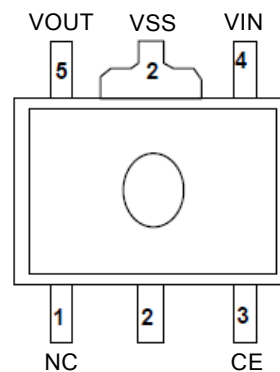


SOT89-5



5. Model selection

Representative number	Describe	Symbol	Describe
① ②	Output voltage	15-50	e.g. $V_{OUT} 1.5V \rightarrow$ ①=1, ②=5
③	Output accuracy	$\pm 2.5\%$	e.g. $V_{OUT} 1.5V \rightarrow$ ③=2, is: 152
④	package	M	SOT23-5
		P	SOT89-5
⑤	Tape	R	Embossed tape, standard inflow

6. Principle block diagram

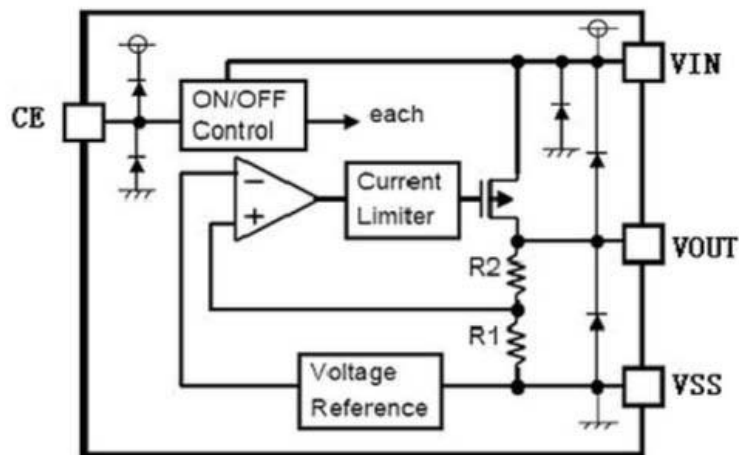




7.Limit parameter

Project	Symbol	parameter	Limit value	unit	
Voltage	V_{IN}	Input voltage	9	V	
	V_{OUT}	Output voltage	$V_{SS}-0.3 \sim V_{IN}+0.3$	V	
electric current	I_{OUT}	Output current	500	mA	
power consumption	PD	SOT23-5	Maximum allowable	250	mW
		SOT89-5	power consumption	350	mW
temperature	T_{OPR}	Working temperature	-40 to 85	°C	
	T_{STG}	Storage temperature	-40 to 125	°C	
	T_{solder}	welding temperature	260	°C,10s	

Notes: The limit parameter refers to the limit value that can't be exceeded under any conditions. If it exceeds this limit value, it may cause physical damage such as product deterioration; At the same time, when the parameters are close to the limit, the chip can't work normally.

8.Typical application

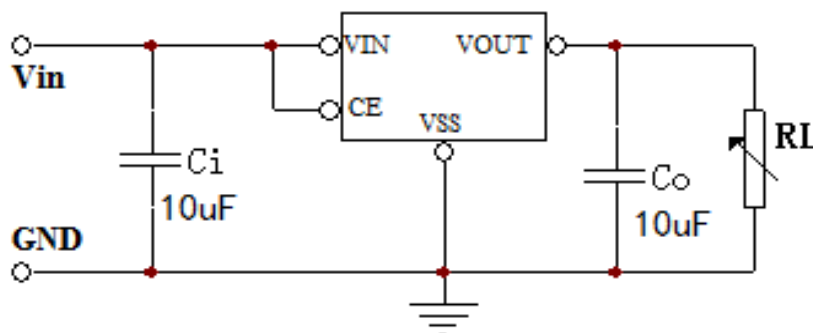



9. Electrical Characteristics

($C_i=C_o=10\mu F$, $T_a=25^\circ C$ unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Output voltage	$V_{OUT}(E)$	$I_{OUT}=1mA$, $V_{IN}=V_{OUT}+1V$, $V_{CE}=1.6V$	$V_{OUT}^*0.975$		$V_{OUT}^*1.025$	V
Maximum output current	$I_{OUT}(max)$	$V_{IN}=V_{OUT}+1V$		300		mA
Load stability	ΔV_{OUT}	$V_{IN}=V_{CE}=V_{OUT}+1V$, $1mA \leq I_{OUT} \leq 100mA$		12		mV
Input stability	$\Delta V_{OUT}/(\Delta V_{IN} * V_{OUT})$	$I_{OUT}=10mA$, $V_{IN}=V_{OUT}+1V \leq V_{IN} \leq 7V$		0.2		%/V
Drop pressure difference	V_{drop1}	$V_{IN}=V_{OUT}+1V$, $I_{OUT}=10mA$		35		mV
	V_{drop2}	$V_{IN}=V_{OUT}+1V$, $I_{OUT}=100mA$		280		mV
quiescent current	I_{SS1}	$V_{IN}=V_{CE}=V_{OUT}+1V$		2		μA
	I_{SS2}	$V_{IN}=V_{OUT}+1V$, $V_{CE}=V_{SS}$			0.5	μA
CE input voltage	V_{CEH}		1.6		V_{IN}	V
	V_{CEL}		0		0.5	V
CE input current	I_{CE}	$V_{CE}=0V$ to V_{IN}			0.5	μA
Ripple suppression ratio	PSRR	$V_{IN}=V_{CE}=V_{OUT}+1V+1V_{p-pAC}$ $I_{OUT}=10mA$, $f=1kHz$		40		dB
Output voltage temperature coefficient	$\Delta V_{OUT}/(\Delta T_A * V_{OUT})$	$V_{IN}=V_{CE}=V_{OUT}+1V$, $I_{OUT}=3mA$ $0^\circ C \leq T_a \leq 60^\circ C$		± 290		ppm/ $^\circ C$
input voltage	V_{IN}		1.8		7	V

Note:

- $V_{OUT}(T)$: the specified output voltage.
- $V_{OUT}(E)$: effective output voltage.
- $I_{OUT}(max)$: Slowly increase the output current to the current value when the output voltage is $\leq V_{OUT}(E) * 95\%$.
- $V_{drop} = V_{IN1} - V_{OUT}(E)s$

V_{IN1} =gradually decrease the input voltage until the output voltage drops to 98% of $V_{OUT}(E)$ 1.

$V_{OUT}(E)s = V_{OUT}(E) * 97.5\%$

$V_{OUT}(E) 1$ =the output voltage value when $V_{IN}=V_{OUT}(T)+1V$ and I_{OUT} =a certain value.




10. Typical Characteristic

<p>Figure 1: Output voltage and output current</p>	<p>Figure 2: Output voltage and input voltage</p>
<p>Figure 3: Dropout voltage and output current</p>	<p>Figure 4: Input voltage and static current</p>
<p>Figure 5: Ripple suppression</p>	<p>Figure 6: Output voltage and temperature</p>



11.1 SOT-23-5 Package Outline Dimensions

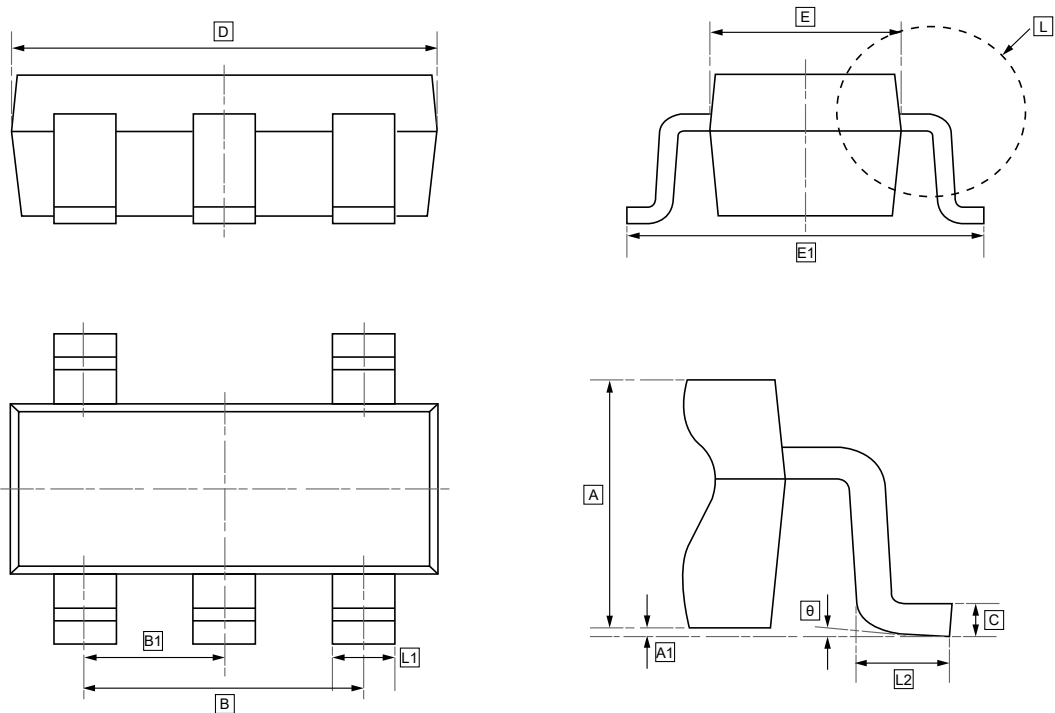


DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	B	B1	C	D	E	E1	L1	L2	θ
Min	1.050	0.000	1.800	0.950	0.100	2.820	1.500	2.650	0.300	0.300	0°
Max	1.150	0.100	2.000	TYP	0.200	3.020	1.700	2.950	0.500	0.600	8°



11.2 SOT-89-5 Package Outline Dimensions

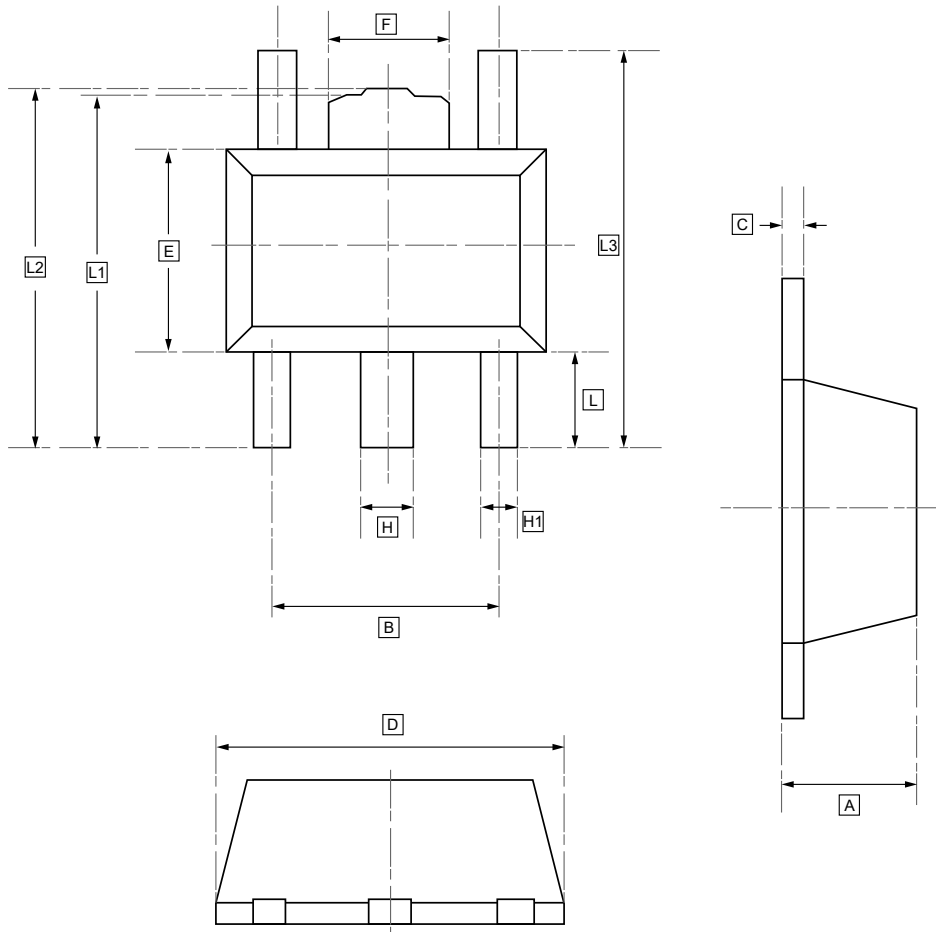


DIMENSIONS (mm are the original dimensions)

Symbol	A	B	C	D	E	F	H	H1	L	L1	L2	L3
Min	1.450	2.950	0.330	4.450	2.450	1.650	0.450	0.370	0.900	4.100	4.100	4.350
Max	1.550	3.050	0.430	4.550	2.550	1.750	0.580	0.480	1.000	4.300	4.350	4.450



12. Ordering information



ww: Batch Code

Order Code	Marking	Package	Base QTY	Delivery Mode	Vout(V)
UMW XC6219B152MR	LXEK	SOT-23-5	3000	Tape and reel	1.5
UMW XC6219B182MR	LXKK	SOT-23-5	3000	Tape and reel	1.8
UMW XC6219B252MR	LXTK	SOT-23-5	3000	Tape and reel	2.5
UMW XC6219B282MR	LXXK	SOT-23-5	3000	Tape and reel	2.8
UMW XC6219B302MR	LXZK	SOT-23-5	3000	Tape and reel	3
UMW XC6219B332MR	LB2K	SOT-23-5	3000	Tape and reel	3.3
UMW XC6219B362MR	LB5K	SOT-23-5	3000	Tape and reel	3.6
UMW XC6219B502MR	LBMK	SOT-23-5	3000	Tape and reel	5
UMW XC6219B152PR	LXEK	SOT89-5	3000	Tape and reel	1.5
UMW XC6219B182PR	LXKK	SOT89-5	3000	Tape and reel	1.8
UMW XC6219B252PR	LXTK	SOT89-5	3000	Tape and reel	2.5
UMW XC6219B282PR	LXXK	SOT89-5	3000	Tape and reel	2.8
UMW XC6219B302PR	LXZK	SOT89-5	3000	Tape and reel	3
UMW XC6219B332PR	LB2K	SOT89-5	3000	Tape and reel	3.3
UMW XC6219B362PR	LB5K	SOT89-5	3000	Tape and reel	3.6
UMW XC6219B502PR	LBMK	SOT89-5	3000	Tape and reel	5



13.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.