UMW AD8613,AD8617,AD8619

Low Cost Micropower, Low Noise CMOS Rail-to-Rail Input/Output Operational Amplifiers

1.Description

The AD8613/AD8617/AD8619 are single, dual, and quad micro-power, rail-to-rail input and output amplifiers that feature low supply current, as well as low input voltage and current noise. The parts are fully specified to operate from 1.8 V to 5 V single supply, or ±0.9 V and ±2.5 V dual supply. The combination of low noise, very low input bias currents, and low power consumption make the AD8613/ AD8617/AD8619 especially useful in portable and loop-powered instrumentation.

The ability to swing rail-to-rail at both the input and output enables designers to buffer CMOS ADCs, DACs, ASICs, and other wide output swing devices in low power, single supply systems.

2.Features

- Offset voltage: 2.2 mV maximum
- Low input bias current: 1 pA maximum
- Single-supply operation: 1.8 V to 5.5 V
- Low noise: 22 nV/√Hz
- Micropower: 50 μA/amplifier maximum over temperature
- No phase reversal
- Unity gain stable
- Qualified for automotive applications

3.Applications

- Battery-powered instrumentation
- Multipole filters
- Current shunt sense
- Sensors
- ADC predrivers
- DAC drivers/level shifters
- Low power ASIC input or output amplifiers

4.Pinning Information

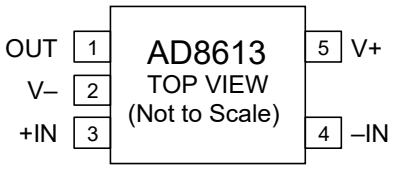

SC70-5

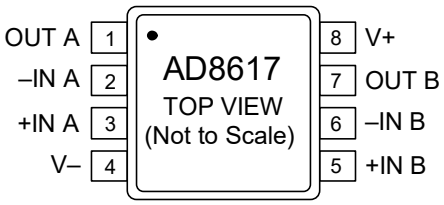

Figure 2. 8-Lead MSOP and 8-Lead SOIC_N

SOP-8

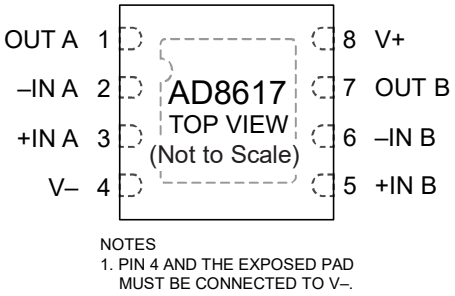

SOP-8

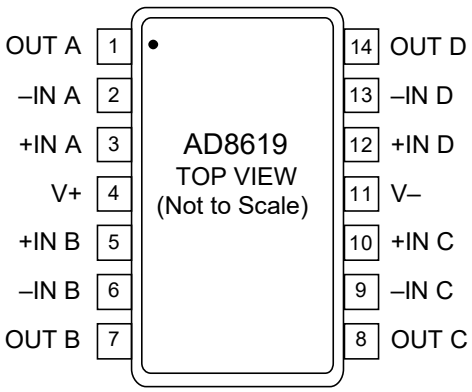

TSSOP-14/SOP-14

5.Absolute Maximum Ratings(T_A= 25°C)

Description		Rating
Supply Voltage		6 V
Input Voltage		VSS − 0.3 V to VDD + 0.3 V
Input Current		±10 mA
Differential Input Voltage		±6 V
Output Short-Circuit Duration to GND		Indefinite
Storage Temperature Range		−65°C to +150°C
Operating Temperature Range		−40°C to +125°C
Junction Temperature Range		−65°C to +150°C
LeadTemperature (soldering, 60 sec)		300°C
ESD AD8613	HBM	±4000V
	FICDM	±1000V
ESD AD8617	HBM	±3000V
	FICDM	±1000V
	MM	±100V
ESD AD8619	HBM	±4000V
	FICDM	±1250V
	MM	±200V

T_A=25°C, unless otherwise noted

6.1Electrical Characteristics

V_{SY}=5 V, V_{CM}=V_{SY}/2, T_A=25°C, unless otherwise noted

Parameter	Symbol	Conditions	Min	Typ	Max	Units
INPUT CHARACTERISTICS						
Offset Voltage	V_{OS}	−0.3V<V_{CM}<+5.3 V		0.4	2.2	mV
		−40°C<T_A<125°C, −0.3V<V_{CM}<5.2 V			2.2	
Offset Voltage Drift	$\Delta V_{OS}/\Delta T$	−40°C<T_A<125°C		1	4.5	μV/°C
AD8613				2.5	7	
Input Bias Current	I_B			0.2	1	pA
		−40°C<T_A<85°C			110	pA
		−40°C<T_A<125°C			780	pA
Input Offset Current	I_{OS}			0.1	0.5	pA
		−40°C<T_A<85°C			50	pA
		−40°C<T_A<125°C			250	pA
Input Voltage Range	IVR		0		5	V
Common-Mode Rejection Ratio	CMRR	0<V_{CM}<5V		95		dB
		−40°C<T_A<125°C	68			
Large Signal Voltage Gain	A_{VO}	R_L=10kΩ, 0.5V<V_O<4.5V	235	500		V/mV
Input Capacitance	C_{DIFF}			1.9		pF
	C_{CM}			2.5		
OUTPUT CHARACTERISTICS						
Output Voltage High	V_{OH}	I_L=1mA	4.95	4.98		V
		−40°C to 125°C	4.9			
		I_L=10mA		4.7		
		−40°C to 125°C	4.5			
Output Voltage Low	V_{OL}	I_L=1mA		20	30	mV
		−40°C to 125°C			50	
		I_L=10mA		190	275	
		−40°C to 125°C			335	

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Short-Circuit Current	I_{SC}			±80		mA
Closed-Loop Output Impedance	Z_{OUT}	f=10kHz, A_V=1		15		Ω
POWER SUPPLY						
Power Supply Rejection Ratio	PSRR	1.8V<V_{SY}<5V	67	94		dB
		−40°C<T_A<+125°C	64			dB
Supply Current/Amplifier	I_{SY}	V_O=V_{SY}/2		38		μA
		−40°C<T_A<+125°C			50	μA
DYNAMIC PERFORMANCE						
Slew Rate	SR	R_L=10kΩ		0.1		V/μs
Settling Time to 0.1%	t_s	G=±1, V_{IN}=2V step, C_L=20pF, R_L=1kΩ		23		μs
Gain Bandwidth Product	GBP	R_L=100kΩ		400		kHz
		R_L=10kΩ		350		kHz
Phase Margin	$Ø_M$	R_L=10kΩ, R_L=100kΩ, C_L=20pF		70		Degrees
NOISE PERFORMANCE						
Peak-to-Peak Noise	e_np-p	0.1Hz to 10Hz		2.3	3.5	μV
Voltage Noise Density	e_n	f=1kHz		25		nV/√Hz
		f=10kHz		22		nV/√Hz
Current Noise Density	i_n	f=1kHz		0.05		pA/√Hz

6.2Electrical Characteristics

V_{SY}=1.8V, V_{CM}=V_{SY}/2, T_A=25°C, unless otherwise noted

Parameter	Symbol	Conditions	Min	Typ	Max	Units
INPUT CHARACTERISTICS						
Offset Voltage	V_{OS}	−0.3V<V_{CM}<1.9V		0.4	2.2	mV
		−40°C<T_A<125°C, −0.3V<V_{CM}<1.8V			2.2	
Offset Voltage Drift	$\Delta V_{OS}/\Delta T$	−40°C<T_A<125°C		1	8.5	μV/°C
AD8613				3.7	9	
Input Bias Current	I_B			0.2	1	pA
		−40°C<T_A<85°C			110	pA
		−40°C<T_A<125°C			780	pA
Input Offset Current	I_{OS}			0.1	0.5	pA
		−40°C<T_A<85°C			50	pA
		−40°C<T_A<125°C			250	pA
Input Voltage Range	IVR		0		1.8	V
Common-Mode Rejection Ratio	CMRR	0<V_{CM}<1.8V	58	86		dB
		−40°C<T_A<125°C	55			
Large Signal Voltage Gain	A_{VO}	R_L=10kΩ, 0.5V<V_O<1.3V	85	1000		V/mV
Input Capacitance	C_{DIFF}			2.1		pF
	C_{CM}			3.8		
OUTPUT CHARACTERISTICS						
Output Voltage High	V_{OH}	I_L=1mA	1.65	1.73		V
		−40°C to 125°C	1.6			
Output Voltage Low	V_{OL}	I_L=10mA		44	60	
		−40°C to 125°C			80	

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Short-Circuit Current	I_{SC}			±7		mA
Closed-Loop Output Impedance	Z_{OUT}	f=10kHz, A_V=1		15		Ω
POWER SUPPLY						
Power Supply Rejection Ratio	PSRR	1.8V<V_{SY}<5V	67	94		dB
Supply Current/Amplifier	I_{SY}	V_O=V_{SY}/2		38		μA
		−40°C<T_A<+125°C			50	μA
DYNAMIC PERFORMANCE						
Slew Rate	SR	R_L=10kΩ		0.1		V/μs
Settling Time to 0.1%	t_s	G=±1, V_{IN}=1V step, C_L=20pF, R_L=1kΩ		6.5		μs
Gain Bandwidth Product	GBP	R_L=100kΩ		400		kHz
		R_L=10kΩ		350		kHz
Phase Margin	$Ø_M$	R_L=10kΩ, R_L=100kΩ, C_L=20pF		70		Degrees
NOISE PERFORMANCE						
Peak-to-Peak Noise	e_np-p	0.1Hz to 10Hz		2.3	3.5	μV
Voltage Noise Density	e_n	f=1kHz		25		nV/√Hz
		f=10kHz		22		nV/√Hz
Current Noise Density	i_n	f=1kHz		0.05		pA/√Hz

7.1Typical Characteristic

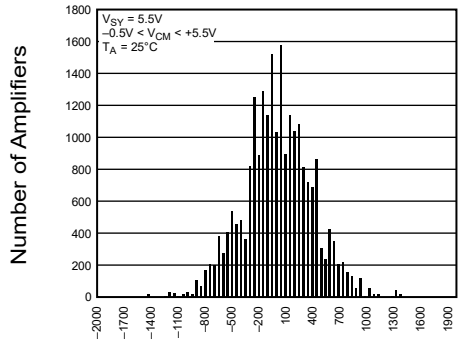

Figure 1: Input Offset Voltage Distribution

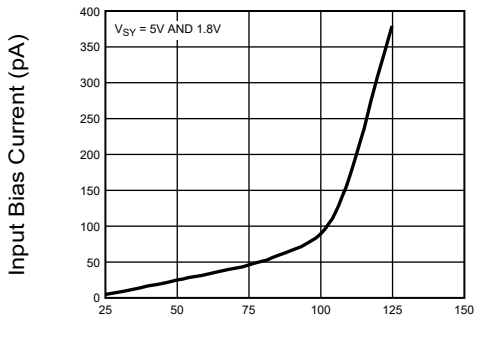

Figure 2: Input Bias Current vs. Temperature

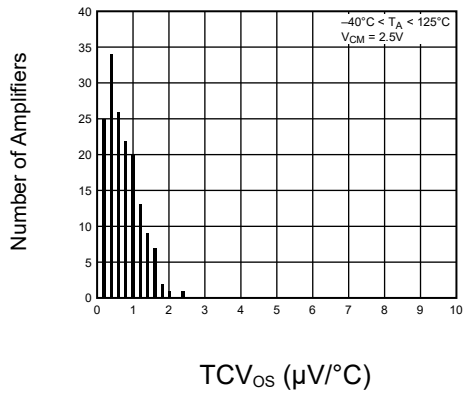

Figure 3: Input Offset Voltage Drift Distribution

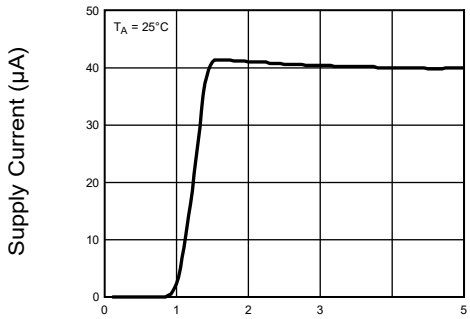

Figure 4: Supply Current vs. Supply Voltage

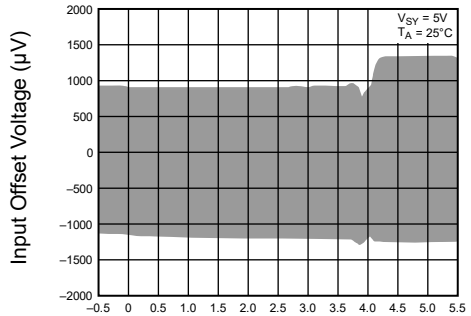

Figure 5: Input Offset Voltage vs. Input Common-Mode Voltage

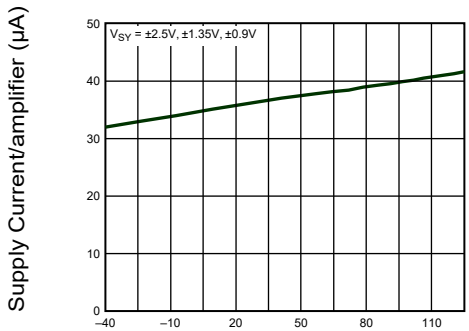

Figure 6: Supply Current vs. Temperature

7.2Typical Characteristic

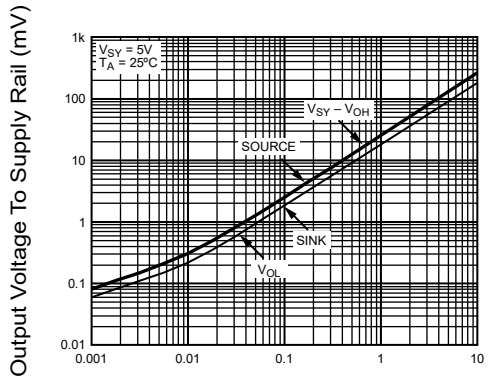

Figure 7: Output Voltage to Supply Rail vs. Load Current

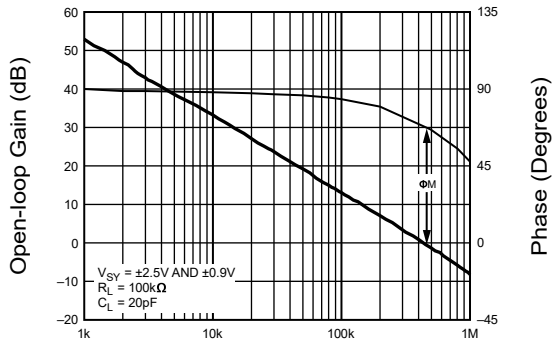

Figure 8: Open-Loop Gain and Phase vs. Frequency

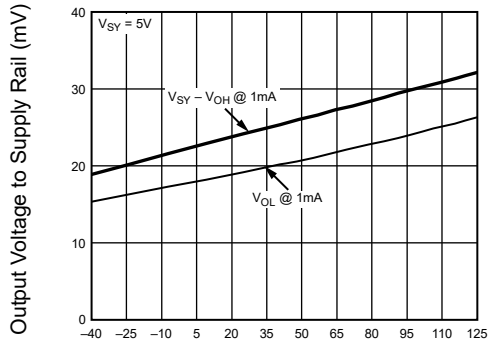

Figure 9: Output Voltage to Supply Rail vs. Temperature (I_L = 1 mA)

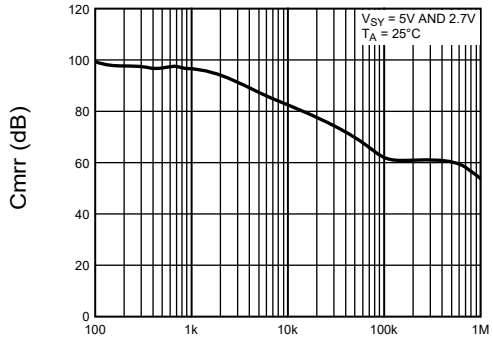

Figure 10: CMRR vs. Frequency

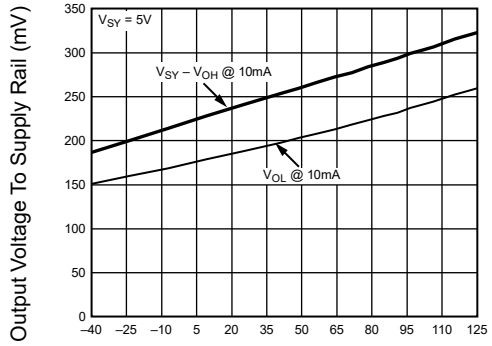

Figure 11: Output Voltage to Supply Rail vs. Temperature (I_L = 10 mA)

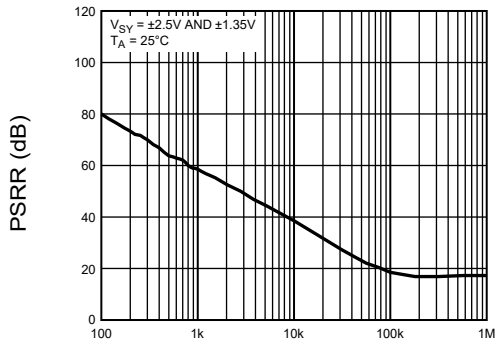

Figure 12: PSRR vs. Frequency

7.3Typical Characteristic

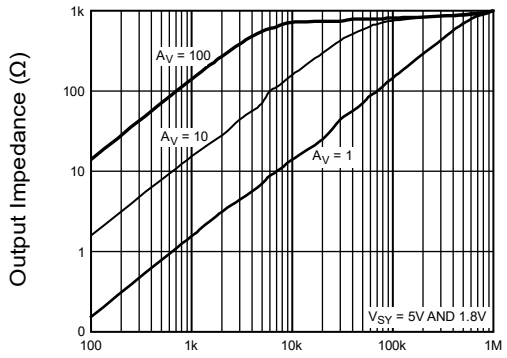

Figure 13: Output Impedance vs. Frequency

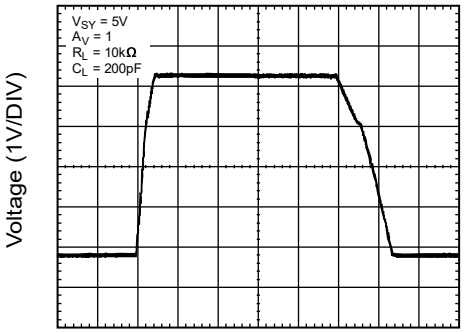

Figure 14: Large Signal Transient Response

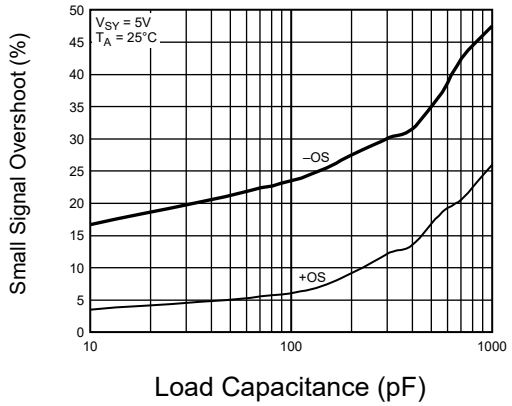

Figure 15: Small Signal Overshoot vs. Load Capacitance

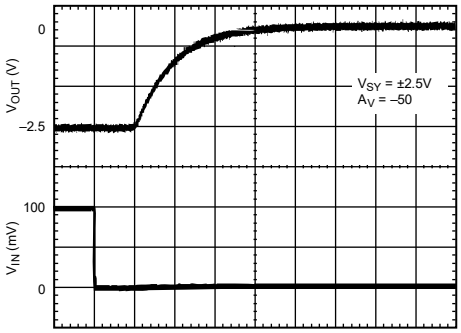

Figure 16: Positive Overload Recovery

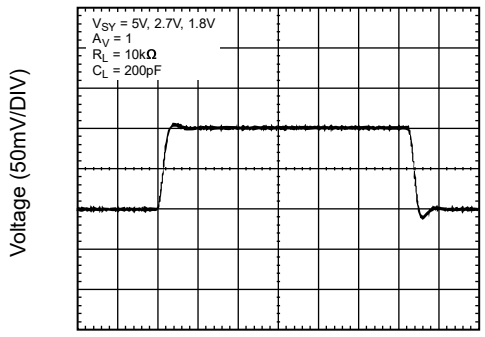

Figure 17: Small Signal Transient Response

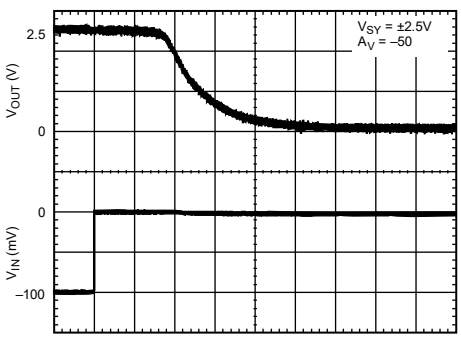

Figure 18: Negative Overload Recovery

7.4Typical Characteristic

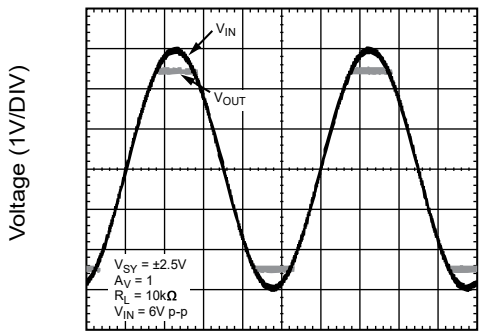

Figure 19: No Phase Reversal

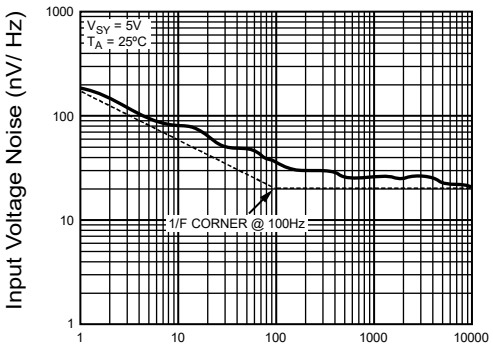

Figure 20: Voltage Noise Density

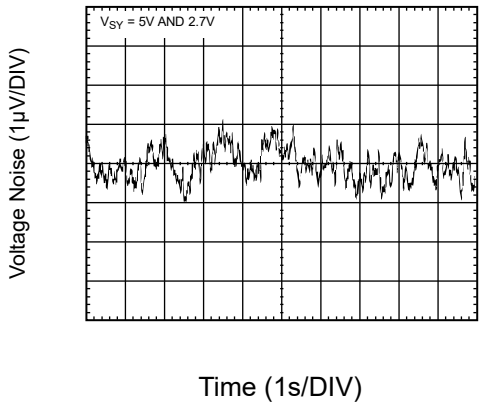

Figure 21: 0.1 Hz to 10 Hz Input Voltage Noise

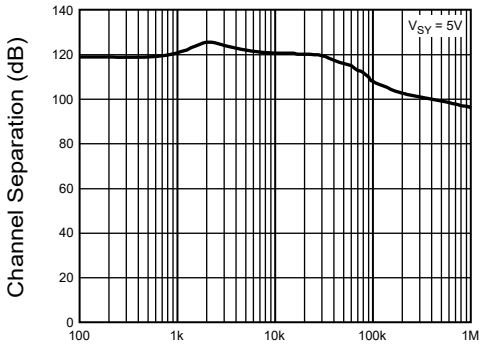

Figure 22: Channel Separation

7.5Typical Characteristic

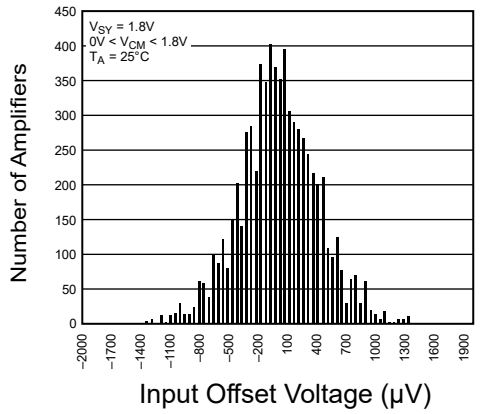

Figure 23: Input Offset Voltage Distribution

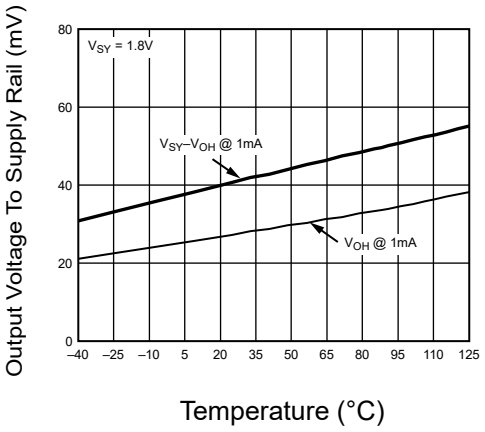

Figure 24: Output Voltage to Supply Rail vs. Temperature (I_L = 1 mA)

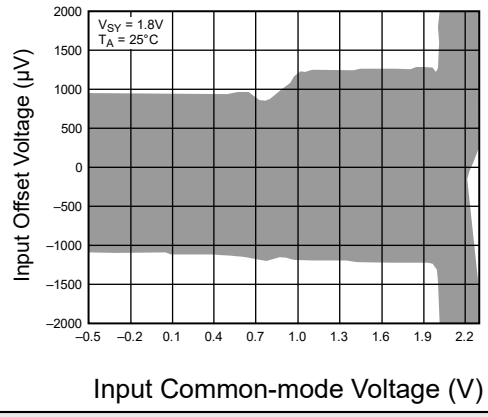

Figure 25: Input Offset Voltage vs. Input Common-Mode Voltage

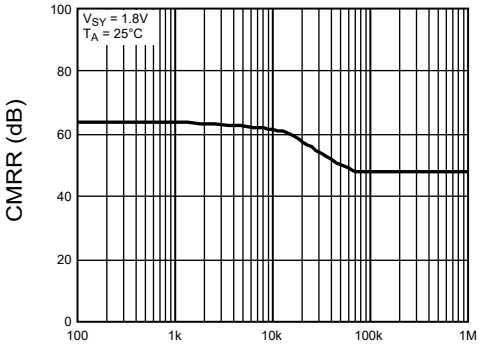

Figure 26: CMRR vs. Frequency

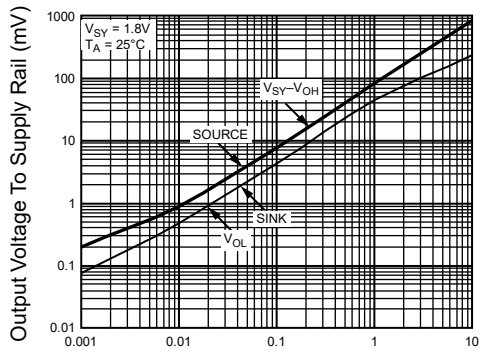

Figure 27: Output Voltage to Supply Rail vs. Load Current

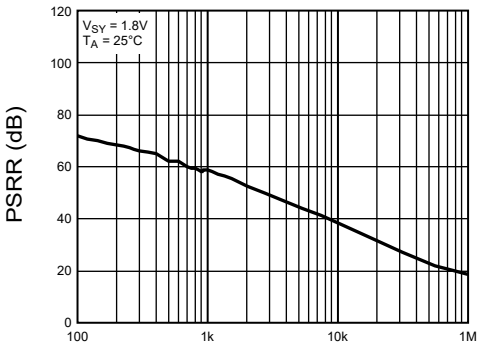

Figure 28: PSRR vs. Frequency

7.6Typical Characteristic

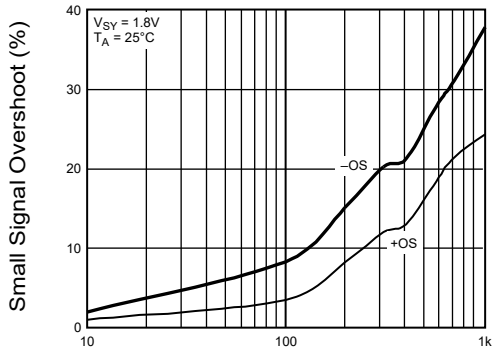

Figure 29: Small Signal Overshoot vs. Load Capacitance

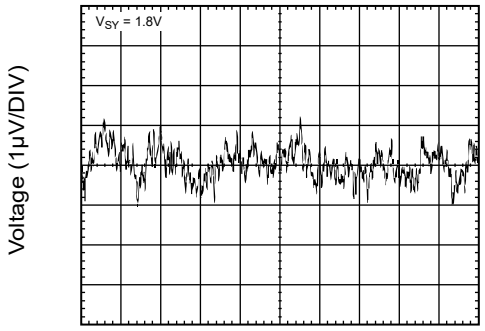

Figure 30: 0.1 Hz to 10 Hz Input Voltage Noise

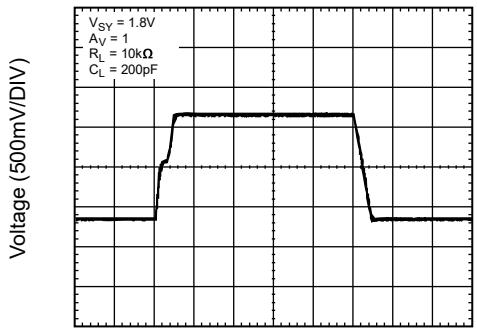

Figure 31: Large Signal Transient Response

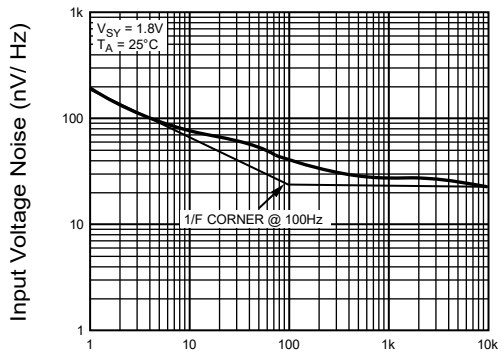

Figure 32: Voltage Noise Density

8.1SOP-14 Package Outline Dimensions

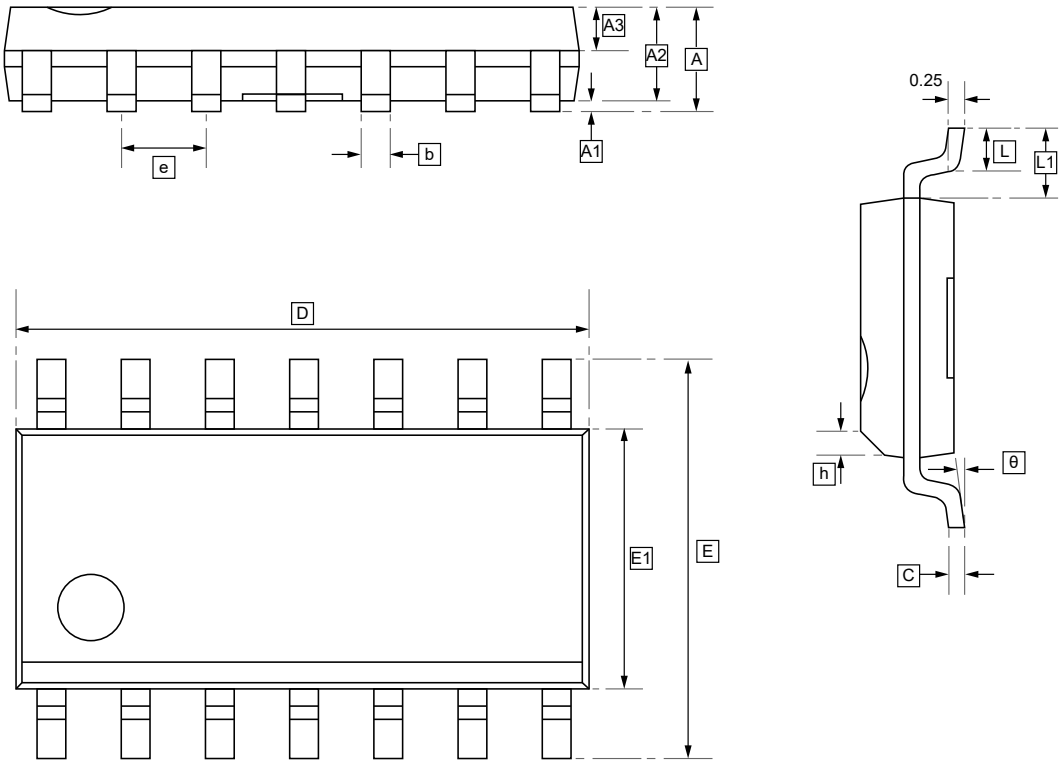

DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	A3	b	C	D	E	E1	e	h	L
Min	-	0.05	1.35	0.65	0.203	0.17	8.45	5.80	3.80	1.24	0.25	0.40
Max	1.75	0.25	1.55	0.75	0.305	0.25	8.85	6.20	4.00	1.30	0.50	0.80

Symbol	L1	θ
Min	1.00	0°
Max	1.10	8°

8.2TSSOP-14 Package Outline Dimensions

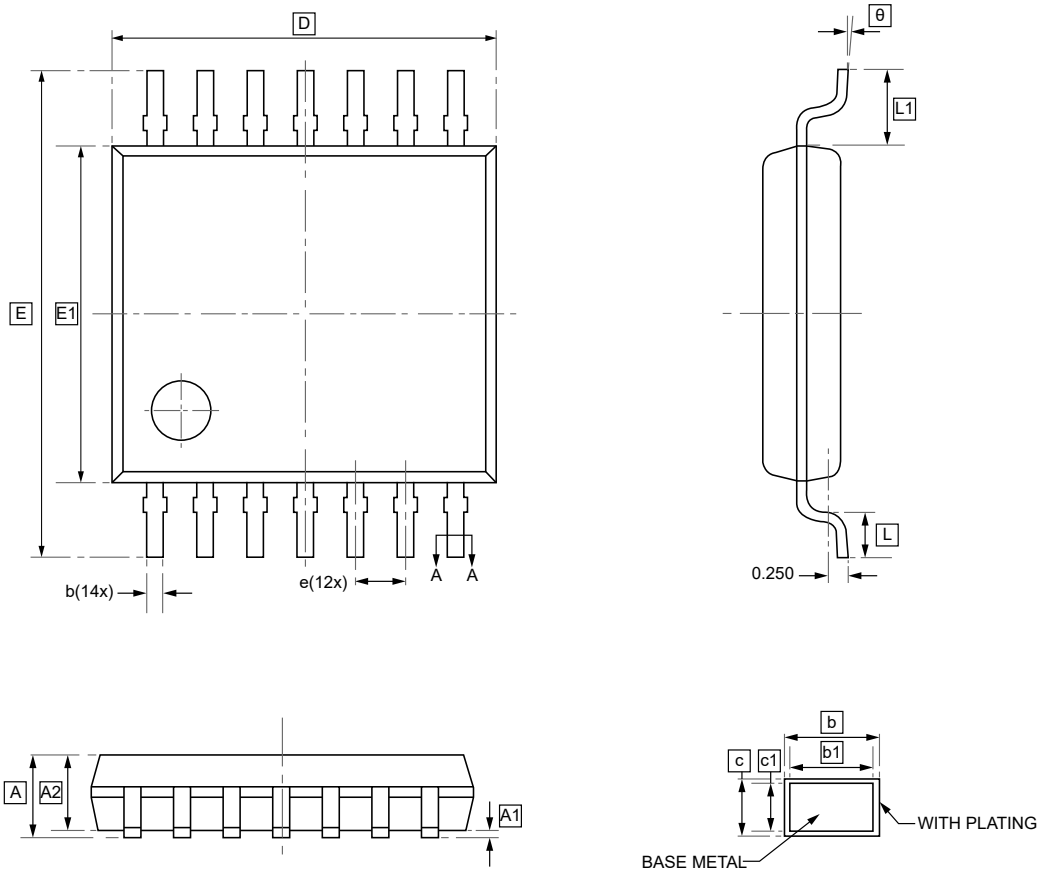

DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	b	b1	c	c1	D	E	E1	e	L1
Min	-	0.05	0.90	0.20	0.19	0.13	0.120	4.90	6.20	4.30	0.65	0.85
Max	1.20	0.15	1.05	0.28	0.25	0.17	0.14	5.10	6.60	4.50	BSC	1.15

Symbol	L	θ
Min	0.45	0°
Max	0.75	8°

8.3SOP-8 Package Outline Dimensions

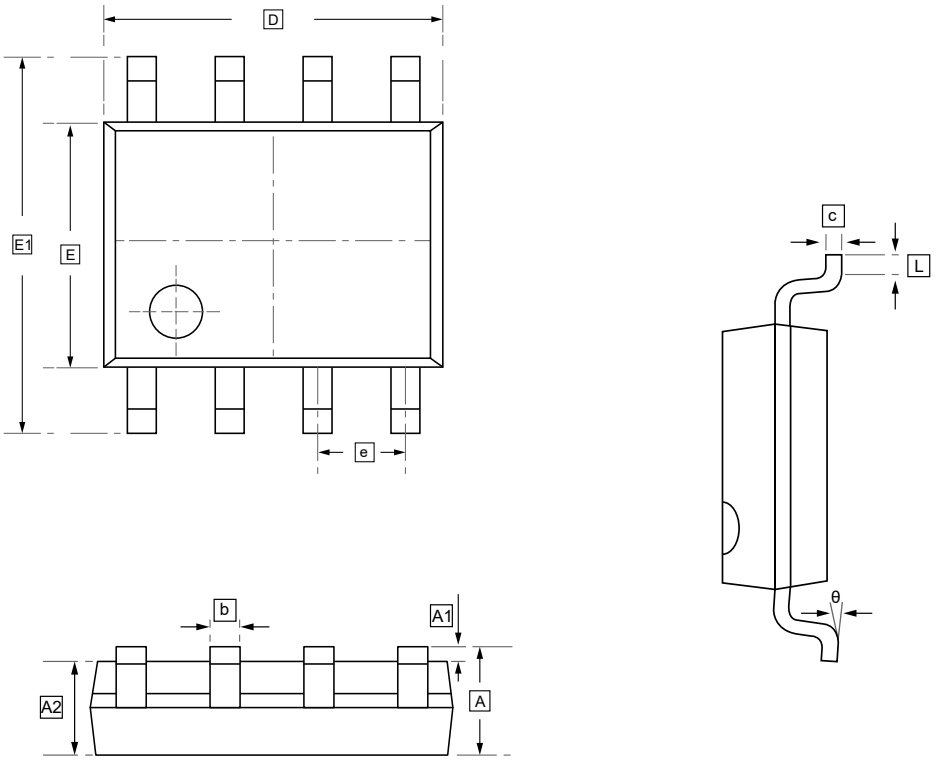

DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	b	c	D	E	E1	e	L	θ
Min	1.350	0.000	1.350	0.330	0.170	4.700	3.800	5.800	1.270	0.400	0°
Max	1.750	0.100	1.550	0.510	0.250	5.100	4.000	6.200	BSC	1.270	8°

8.4SC70-5 Package Outline Dimensions

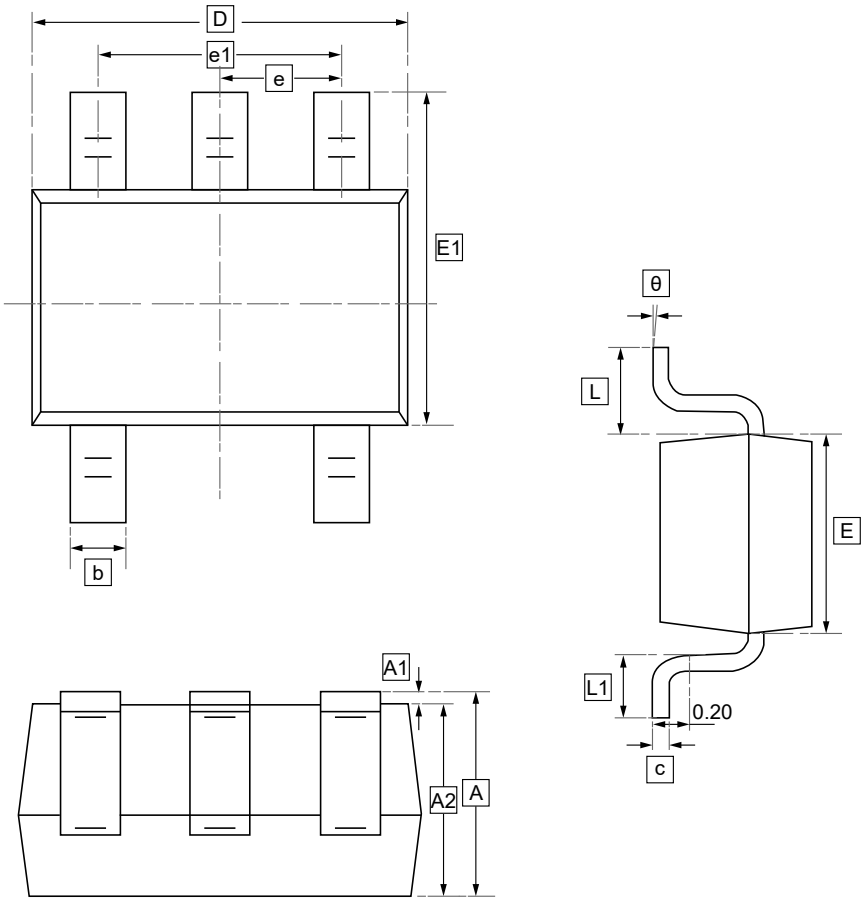

DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	b	c	D	E	E1	e	e1	L	θ
Min	0.90	0.00	0.90	0.15	0.08	2.05	1.15	2.15	0.65	1.20	0.26	7°
Max	1.10	0.10	1.00	0.35	0.15	2.25	1.35	2.45	TYP	1.40	0.46	REF.

9.Ordering information

SOP-14

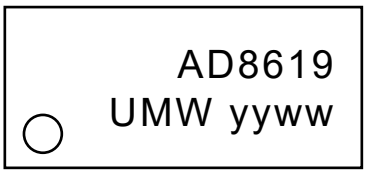

TSSOP-14



SC70-5



yww: Batch Code

SOP-8



yy: Year Code
ww: Week Code

Order Code	Marking	Package	Base QTY	Delivery Mode
UMW AD8613AKSZ	A0Y	SC70-5	3000	Tape and reel
UMW AD8617ARZ	AD8617	SOP-8	2500	Tape and reel
UMW AD8619ARZ	AD8619	SOP-14	2500	Tape and reel
UMW AD8619ARUZ	AD8619	TSSOP-14	4000	Tape and reel

10.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.