# UMW NTD3055L104T4G

60V N-Channel MOSFET

## 1.Features

- $V_{DS\ (V)}$=60V
- $I_D$=12A
- $R_{DS(ON)}$<55mΩ($V_{GS}$=5V)
- Power Supplies
- Converters
- Power Motor Controls
- Bridge Circuits


## 2.Applications


- Tighter $V_{SD}$ Specification
- Lower Diode Reverse Recovery Time
- Lower Reverse Recovery Stored Charge
- Lower $R_{DS(ON)}$
- Lower $V_{DS(ON)}$

## 3.Pinning information

| Pin | Symbol | Description |
|---|---|---|
| 1 | G | GATE |
| 3 | S | SOURCE |
| 2 | D | DRAIN |

**TO-252(DPAK)**
**top view**




## 4.Absolute Maximum Ratings $T_J$= 25°C

| Parameter | Symbol | Rating | Units |
|---|---|---|---|
| Drain-to-Source Voltage | $V_{DSS}$ | 60 | $V_{dc}$ |
| Drain−to−Gate Voltage ($R_{GS}$=1MΩ) | $V_{DGR}$ | 60 | $V_{dc}$ |
| Gate−to−Source Voltage, Continuous | $V_{GS}$ | ±15 | $V_{dc}$ |
| − Non−Repetitive (tp≤10 ms) | $V_{GS}$ | ±20 | $V_{dc}$ |
| Drain Current − Continuous @ $T_A$=25°C | $I_D$ | 12 | $A_{dc}$ |
| − Continuous @ $T_A$=100°C | $I_D$ | 10 | $A_{dc}$ |
| − Single Pulse ($t_p$≤10 μs) | $I_{DM}$ | 45 | $A_{pk}$ |

| | | | |
|---|---|---|---|
| Total Power Dissipation @ $T_A$ = 25°C | $P_D$ | 48 | W |
| Derate above 25°C | | 0.32 | W/°C |
| Total Power Dissipation @ $T_A$ = 25°C (Note 1) | | 2.1 | W |
| Total Power Dissipation @ $T_A$ = 25°C (Note 2) | | 1.5 | W |
| Operating and Storage Temperature Range | $T_J$,$T_{STG}$ | −55 to 175 | °C |
| Single Pulse Drain-to-Source Avalanche Energy-Starting Tj= 25°C ($V_{DD}$=25Vdc, $V_{GS}$=5Vdc $I_{L(pk)}$=11A,L=1mH, $V_{DS}$=60Vdc) | $E_{AS}$ | 61 | mJ |
| Thermal Resistance-Junction-to-Case | $R_{\theta JC}$ | 3.13 | °C/W |
| -Junction-to-Ambient (Note 1) | $R_{\theta JA}$ | 71.4 | °C/W |
| -Junction-to-Ambient (Note 2) | $R_{\theta JA}$ | 100 | °C/W |
| Maximum Lead Temperature for SolderingPurposes, 1/8 in. from case for10 seconds | $T_L$ | 260 | °C |

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

1. When surface mounted to an FR4 board using 1 in pad size (Cu area = 1.127 in $^2$).
2. When surface mounted to an FR4 board using the minimum recommended pad size (Cu area = 0.412 in $^2$)

## 5.Electrical Characteristics @ $T_J$ = 25°C (unless otherwise specified)

| Parameter | Symbol | Conditions | Min | Typ | Max | Units |
|---|---|---|---|---|---|---|
| **OFF CHARACTERISTICS** | | | | | | |
| Drain−to−Source Breakdown Voltage | $V_{(BR)DSS}$ | $V_{GS}$=0Vdc, $I_D$=250μAdc | 60 | | | Vdc |
| (Temperature Coefficient Positive) (Note 3) | | | | 62.9 | | mV/°C |
| Zero Gate Voltage Drain Current | $I_{DSS}$ | $V_{DS}$=60Vdc, $V_{GS}$=0Vdc | | | 1 | μAdc |
| | | $V_{DS}$=60Vdc,$V_{GS}$=0Vdc,$T_J$=150°C | | | 10 | μAdc |
| Gate−Body Leakage Current | $I_{GSS}$ | $V_{GS}$=±15Vdc, $V_{DS}$=0Vdc | | | ±100 | nAdc |
| **ON CHARACTERISTICS** | | | | | | |
| Gate Threshold Voltage(Note 3) | $V_{GS(th)}$ | $V_{DS}$=$V_{GS}$, $I_D$=250μAdc | 1 | 1.6 | 2 | Vdc |
| (Negative Temperature Coefficient) | | | | 4.2 | | mV/°C |
| Static Drain−Source On−State Resistance | $R_{DS(ON)}$ | $V_{GS}$=5Vdc, $I_D$=6Adc | | 38 | 55 | mΩ |
| Static Drain−to−Source | $V_{DS(ON)}$ | $V_{GS}$=5Vdc,$I_D$=12Adc | | 0.98 | 1.5 | Vdc |
| On−Voltage (Note 3) | | $V_{GS}$=5Vdc,$I_D$=6Adc,$T_J$=150°C | | 0.86 | | Vdc |
| Forward Transconductance | $g_{FS}$ | $V_{DS}$=8Vdc, $I_D$=6Adc | | 9.1 | | Mhos |
| **DYNAMIC CHARACTERISTICS** | | | | | | |
| Input Capacitance | $C_{iss}$ | $V_{DS}$=25Vdc, $V_{GS}$=0Vdc f=1MHz | | 316 | 440 | pF |
| Output Capacitance | $C_{oss}$ | | | 105 | 150 | pF |
| Transfer Capacitance | $C_{rss}$ | | | 35 | 70 | pF |
| **SWITCHING CHARACTERISTICS** | | | | | | |
| Turn-On Delay Time | $t_{D(on)}$ | $V_{DD}$=30Vdc, $I_D$=12Adc $V_{GS}$=5Vdc, $R_G$=9.1Ω(Note 3) | | 9.2 | 20 | ns |
| Rise Time | $t_r$ | | | 104 | 210 | ns |
| Turn-Off Delay Time | $t_{D(off)}$ | | | 19 | 40 | ns |
| Fall Time | $t_f$ | | | 40.5 | 80 | ns |
| Gate Charge | $Q_T$ | $V_{DS}$=48Vdc, $I_D$=12Adc $V_{GS}$=5Vdc(Note 3) | | 7.4 | 20 | nC |
| | $Q_1$ | | | 2 | | nC |
| | $Q_2$ | | | 4 | | nC |

| DRAIN−SOURCE DIODE CHARACTERISTICS (Note 3) | | | | | | |
|---|---|---|---|---|---|---|
| Forward On−Voltage | $V_{SD}$ | $I_S$=12Adc, $V_{GS}$=0V(Note 3) | | 0.95 | 1.2 | Vdc |
| | | $I_S$=12Adc, $V_{GS}$=0V, $T_J$=150°C | | 0.82 | | Vdc |
| Reverse Recovery Time | $t_{rr}$ | $I_S$=12A, $dI_S/dt$=100 A/μs(Note 3) $V_{GS}$=0Vdc | | 35 | | ns |
| | $t_a$ | | | 21 | | ns |
| | $t_b$ | | | 14 | | ns |
| Reverse Recovery Stored Charge | $Q_{rr}$ | | | 0.04 | | μC |

3. Indicates Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

4. Switching characteristics are independent of operating junction temperatures.

## 6.1Typical Characterisitics

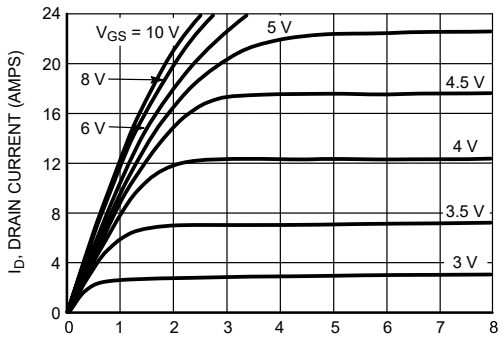



Figure 1: On−Region Characteristics

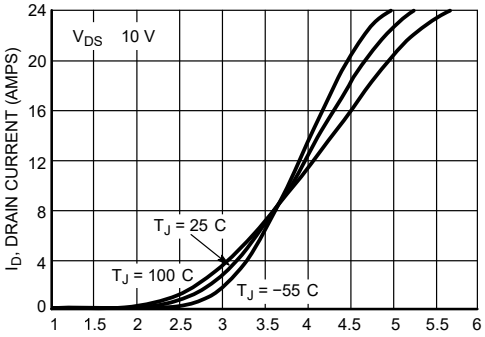



Figure 2: Transfer Characteristics

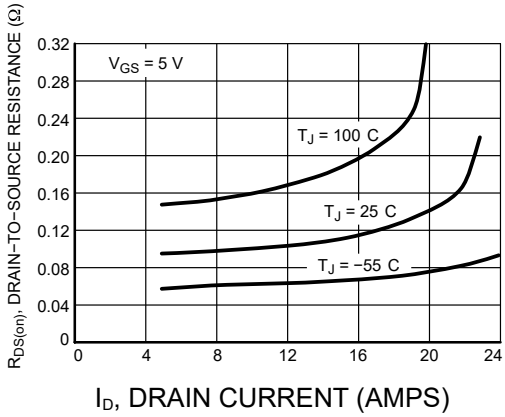



Figure 3: On−Resistance versus Drain Current and Temperature

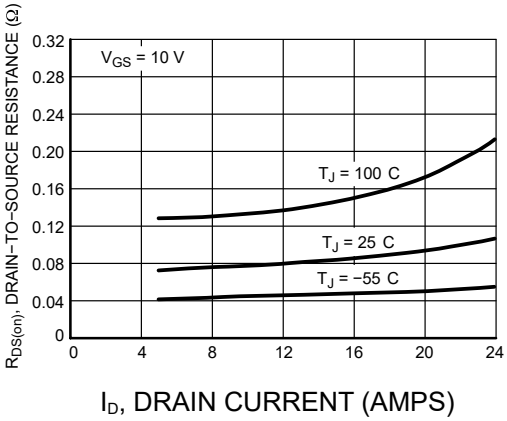



Figure 4: On−Resistance versus Drain Current and Gate Voltage

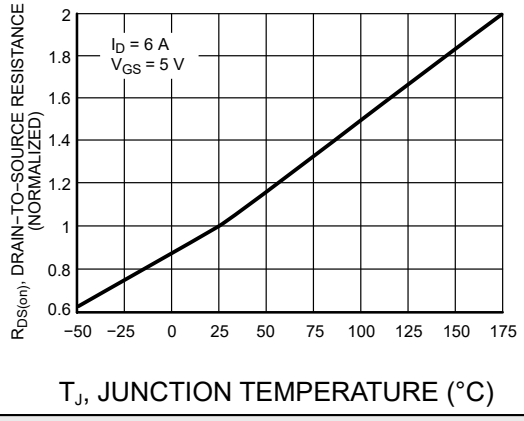



Figure 5: On−Resistance Variation with Temperature

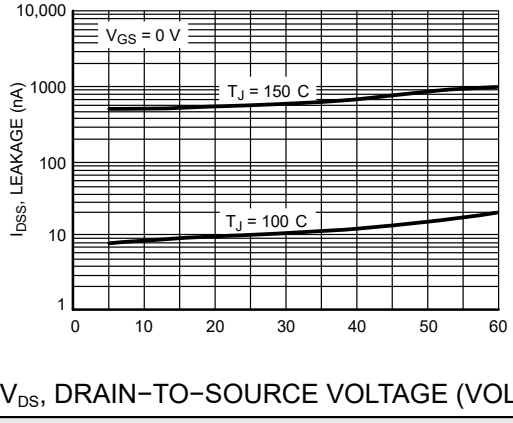



Figure 6: . Drain−To−Source Leakage Current versus Voltage

## 6.2Typical Characterisitics

Switching behavior is most easily modeled and predicted by recognizing that the power MOSFET is charge controlled. The lengths of various switching intervals (t) are determined by how fast the FET input capacitance can be charged by current from the generator.

The published capacitance data is difficult to use for calculating rise and fall because drain-gate capacitance varies greatly with applied voltage. Accordingly, gate charge data is used. In most cases, a satisfactory estimate of average input current ($I_{G(AV)}$) can be made from a rudimentary analysis of the drive circuit so that

$t = Q/I_{G(AV)}$

During the rise and fall time interval when switching a resistive load, $V_{GS}$ remains virtually constant at a level known as the plateau voltage, $V_{SGP}$. Therefore, rise and fall times may be approximated by the following:

$t_r = Q_2 \times R_G/(V_{GG} - V_{GSP})$

$t_f = Q_2 \times R_G/V_{GSP}$

where

$V_{GG}$ = the gate drive voltage, which varies from zero to $V_{GG}$ $R_G$ = the gate drive resistance

and $Q_2$ and $V_{GSP}$ are read from the gate charge curve.

During the turn-on and turn-off delay times, gate current is not constant. The simplest calculation uses appropriate values from the capacitance curves in a standard equation for voltage change in an $R_C$ network. The equations are:

$t_{d(on)} = R_G C_{iss} \ln [V_{GG}/(V_{GG} - V_{GSP})]$

$t_{d(off)} = R_G C_{iss} \ln (V_{GG}/V_{GSP})$

The capacitance ($C_{iss}$) is read from the capacitance curve at a voltage corresponding to the off-state condition when calculating $t_{d(on)}$ and is read at a voltage corresponding to the on-state when calculating $t_{d(off)}$.

At high switching speeds, parasitic circuit elements complicate the analysis. The inductance of the MOSFET source lead, inside the package and in the circuit wiring which is common to both the drain and gate current paths, produces a voltage at the source which reduces the gate drive current. The voltage is determined by Ldi/dt, but since di/dt is a function of drain current, the mathematical solution is complex.The MOSFET output capacitance also complicates the mathematics. And finally, MOSFETs have finite internal gate resistance which effectively adds to the resistance of the driving source, but the internal resistance is difficult to measure and, consequently, is not specified.

The resistive switching time variation versus gate resistance (Figure 9) shows how typical switching performance is affected by the parasitic circuit elements. If the parasitics were not present, the slope of the curves would maintain a value of unity regardless of the switching speed. The circuit used to obtain the data is constructed to minimize common inductance in the drain and gate circuit loops and is believed readily achievable with board mounted components. Most power electronic loads are inductive; the data in the figure is taken with a resistive load, which approximates an optimally snubbed inductive load. Power MOSFETs may be safely operated into an inductive load; however, snubbing reduces switching losses.

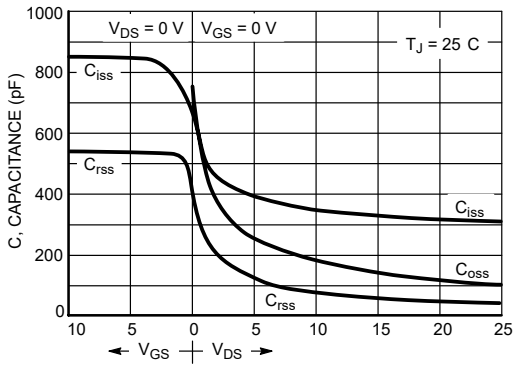



Figure 7. Capacitance Variation

## 6.3Typical Characterisitics

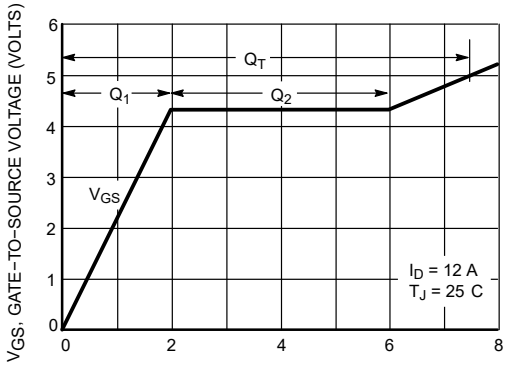



Figure 8: Gate−To−Source and Drain−To−Source Voltage versus Total Charge

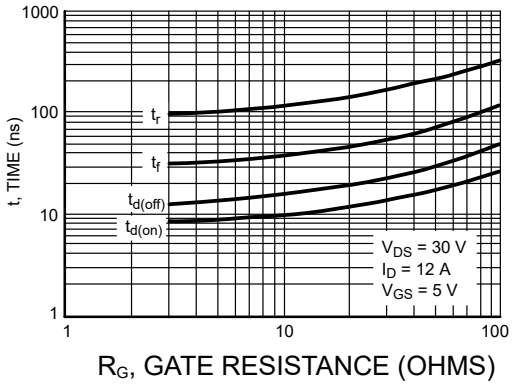



Figure 9: Resistive Switching Time Variation versus Gate Resistance

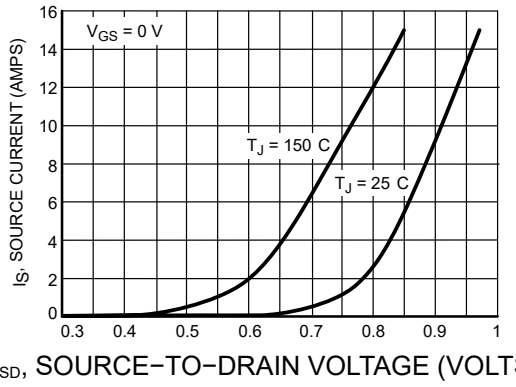



Figure 10: Diode Forward Voltage versus Current

## 6.4Typical Characterisitics

The Forward Biased Safe Operating Area curves define the maximum simultaneous drain-to-source voltage and drain current that a transistor can handle safely when it is forward biased. Curves are based upon maximum peak junction temperature and a case temperature ($T_C$) of 25°C. Peak repetitive pulsed power limits are determined by using the thermal response data in conjunction with the procedures discussed in AN569, “Transient Thermal Resistance - General Data and Its Use.”

Switching between the off-state and the on-state may traverse any load line provided neither rated peak current ($I_{DM}$) nor rated voltage ($V_{DSS}$) is exceeded and the transition time (tr,tf) do not exceed 10 s. In addition the total power averaged over a complete switching cycle must not exceed ($T_{J(MAX)}$ - $T_C$)/($R_{JC}$).

A Power MOSFET designated E -FET can be safely used in switching circuits with unclamped inductive loads. For reliable operation, the stored energy from circuit inductance dissipated in the transistor while in avalanche must be less than the rated limit and adjusted for operating conditions differing from those specified. Although industry practice is to rate in terms of energy, avalanche energy capability is not a constant. The energy rating decreases non-linearly with an increase of peak current in avalanche and peak junction temperature.

Although many E-FETs can withstand the stress of drain-to-source avalanche at currents up to rated pulsed current ($I_{DM}$), the energy rating is specified at rated continuous current ($I_D$), in accordance with industry custom. The energy rating must be derated for temperature as shown in the accompanying graph (Figure 12). Maximum energy at currents below rated continuous ID can safely be assumed to equal the values indicated.

## 6.5Typical Characterisitics

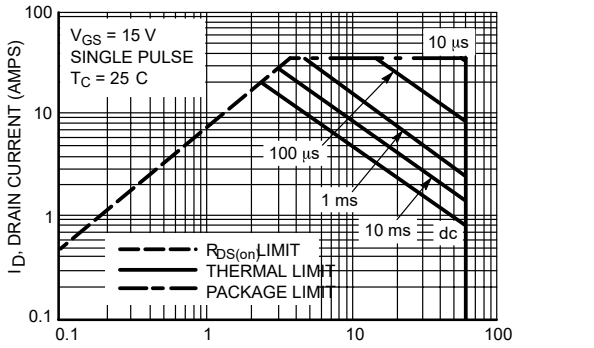



Figure 11: Maximum Rated Forward Biased Safe Operating Area

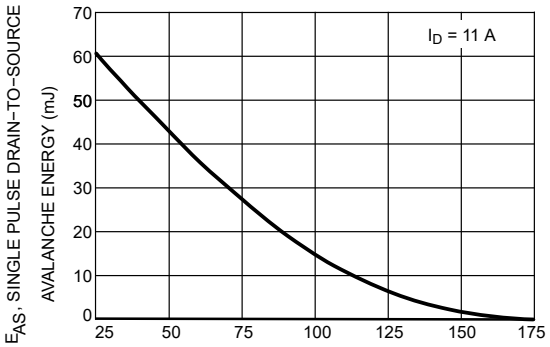



Figure 12: Maximum Avalanche Energy versus Starting Junction Temperature

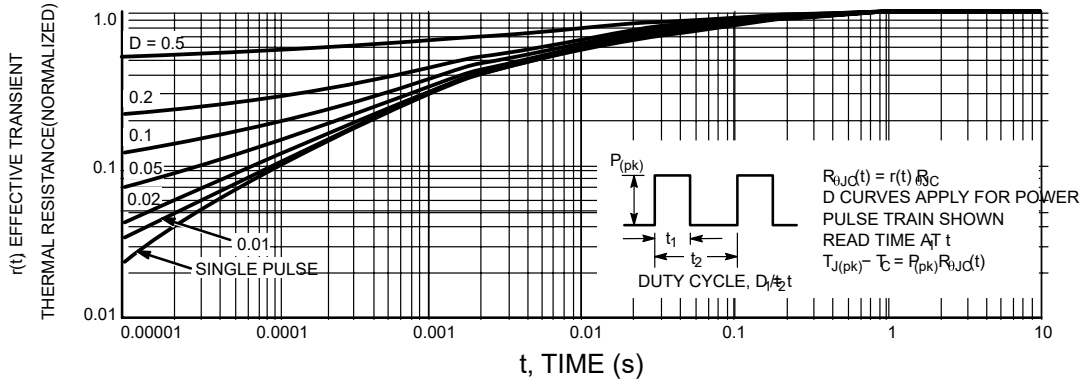



Figure 13: Thermal Response


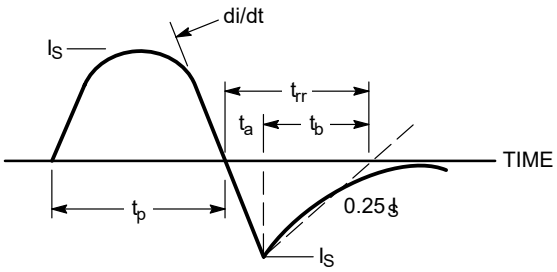



Figure 14: Diode Reverse Recovery Waveform


## 7.TO-252 Package Outline Dimensions

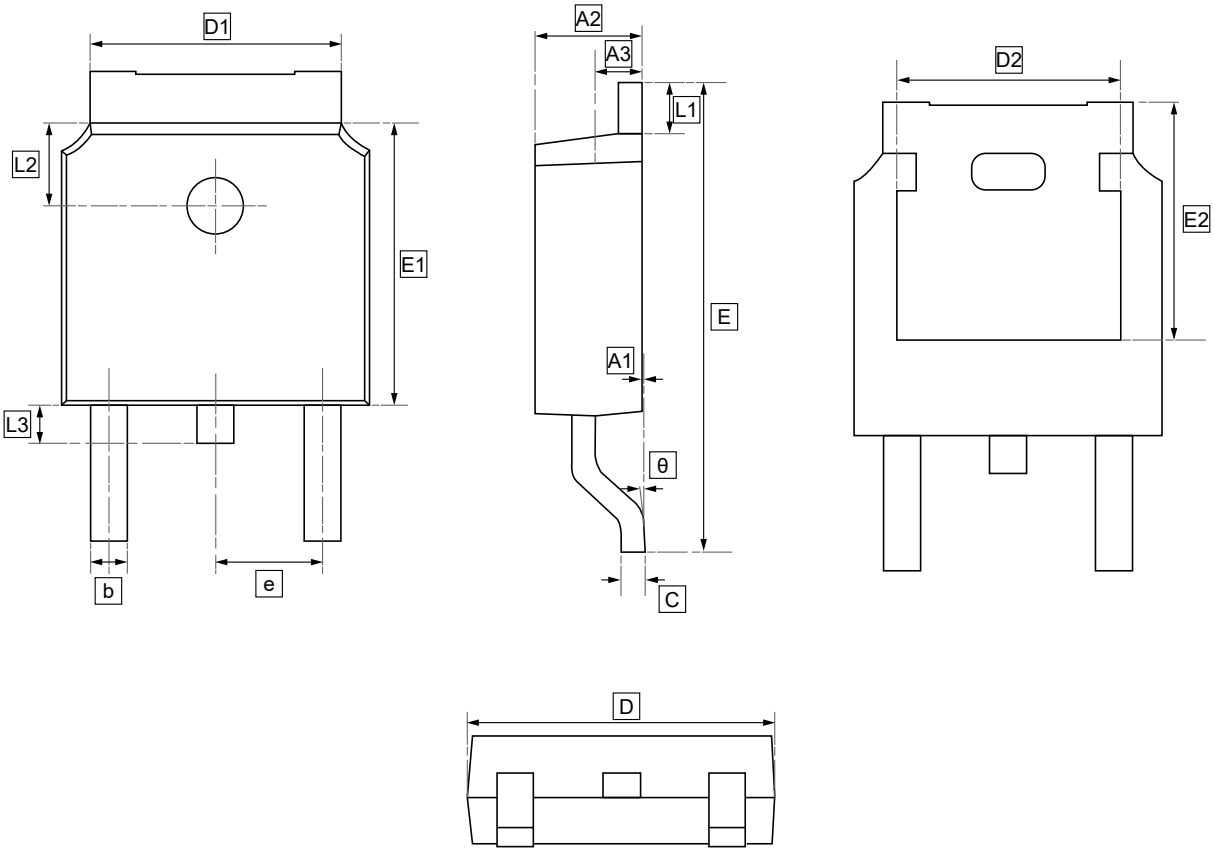


**DIMENSIONS (mm are the original dimensions)**

| Symbol | A1 | A2 | A3 | b | c | D | D1 | D2 | E | E1 | E2 | e | L1 | L2 | L3 | θ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Min | 0.00 | 2.18 | 0.90 | 0.65 | 0.46 | 6.35 | 4.95 | 4.32 | 9.40 | 5.97 | 5.21 | 2.286 | 0.89 | 1.70 | 0.60 | 0.00 |
| Max | 0.13 | 2.39 | 1.10 | 0.85 | 0.61 | 6.73 | 5.46 | 4.90 | 10.41 | 6.22 | 5.38 | BSC | 1.27 | 1.90 | 1.00 | 8.00 |

## 8.Ordering information




yy: Year Code
ww: Week Code

| Order Code | Package | Base QTY | Delivery Mode |
|---|---|---|---|
| UMW NTD3055L104T4G | TO-252 | 2500 | Tape and reel |

## 9.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.