


1.Description

- Ultra low capacitance: 0.3pF typical (I/O-IO)
- Ultra low leakage: nA level
- Low operating voltage: 5V
- Low clamping
- Up to 4 data lines and one power line protects
- – IEC 61000-4-2 (ESD) immunity test
Air discharge: $\pm 30\text{kV}$
Contact discharge: $\pm 25\text{kV}$
- IEC61000-4-4 (EFT) 40A (5/50ns)
- IEC61000-4-5 (Lightning) : 4A(8/20 μs)

2.Applications

- USB 2.0 and USB 3.0 Ports
- USB OTG
- Digital video interface(DVI)
- Monitor and Flat Panel Displays
- PCI Express and Serial SATA Ports
- Gigabit Ethernet
- IEEE 1394 firewire ports
- Consumer products (STB, DVD, DSC, DVC...)

3.Pinning information



SOT-363



4. Absolute Maximum Rating

Parameter	Symbol	Value	Units
Peak Pulse Power ($t_p=8/20\mu s$)	P_{PP}	100	W
Peak Pulse Current ($t_p=8/20\mu s$)	I_{PP}	4	A
ESD per IEC 61000-4-2 (Air)	V_{ESD}	± 30	kV
ESD per IEC 61000-4-2 (Contact)		± 25	kV
Junction Temperature Range	T_J	-55 to 125	$^{\circ}C$
Storage Temperature Range	T_{STG}	-55 to 150	$^{\circ}C$


5. Electrical Characteristics ($T_A=25^{\circ}C$ unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Reverse Working Voltage	V_{RWM}	Any I/O pin to ground			5	V
Breakdown Voltage	V_{BR}	$I_T=1mA$, any I/O pin to ground	6			V
Reverse Leakage Current	I_R	$V_{RWM}=5V$, any I/O pin to ground			0.5	μA
Clamping Voltage	V_C	$I_{PP}=1A(8x 20\mu s \text{ pulse})$ any I/O pin to ground			15	V
		$I_{PP}=4A(8x 20\mu s \text{ pulse})$ any I/O pin to ground			20	V
Parasitic Capacitance	C_J	$V_R=0V$, $f=1MHz$, between I/O pins		0.3	0.4	pF
		$V_R=0V$, $f=1MHz$, any I/O pin to ground			0.8	pF

Notes: I/O pins are Pin 1, 3, 4 and 6.




6. Typical characteristic

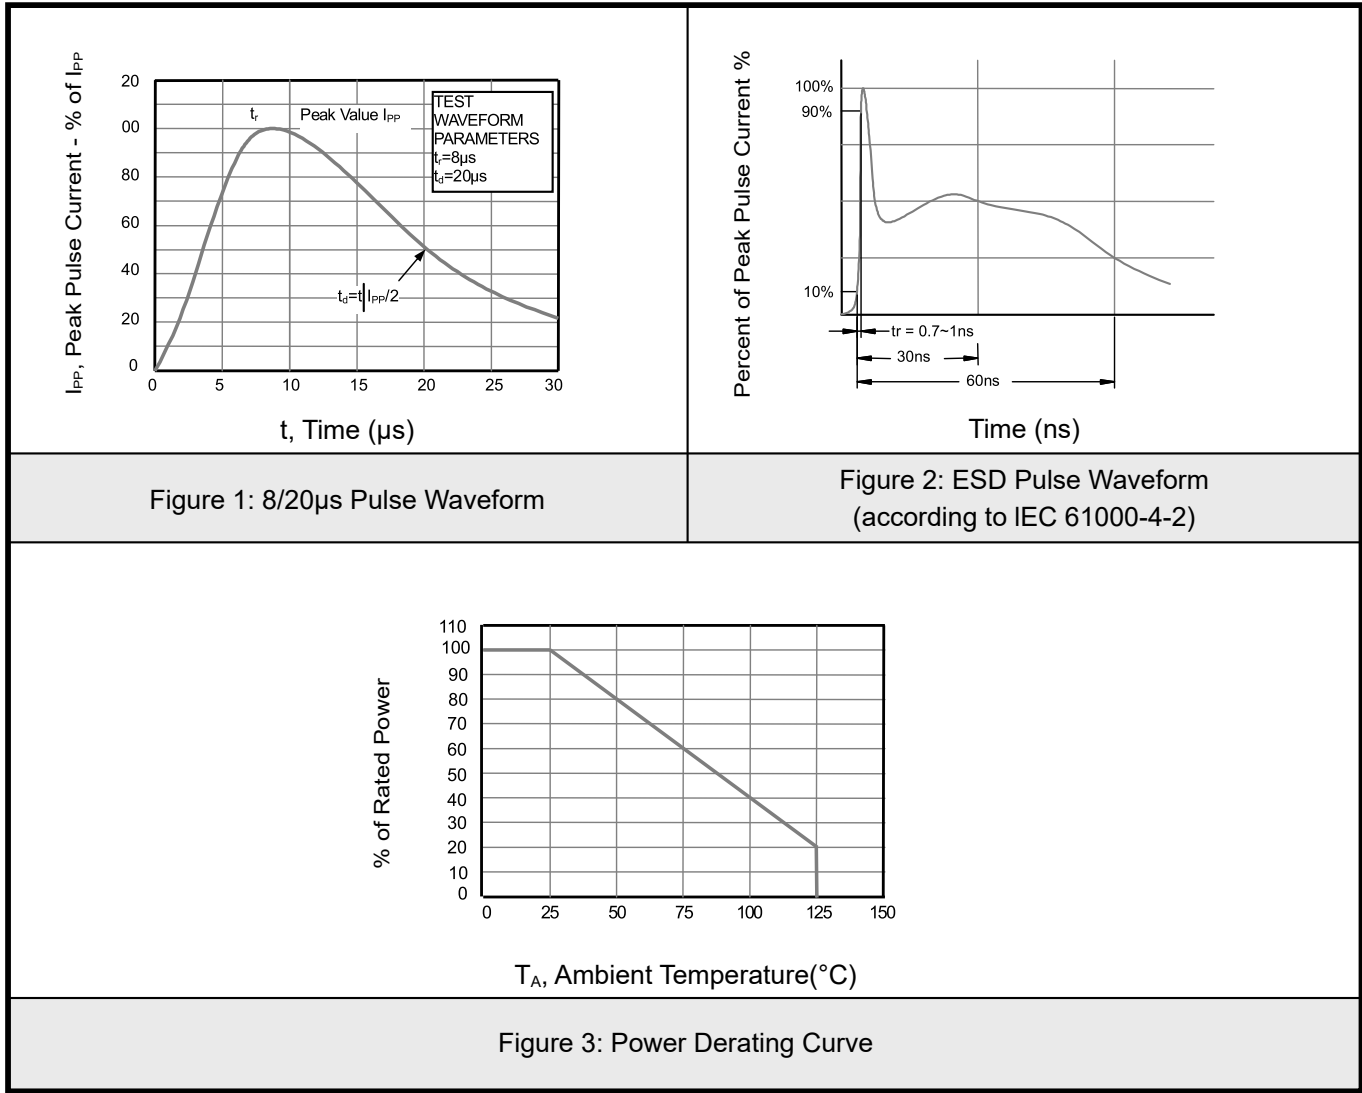



7.SOT-363 Package Outline Dimensions

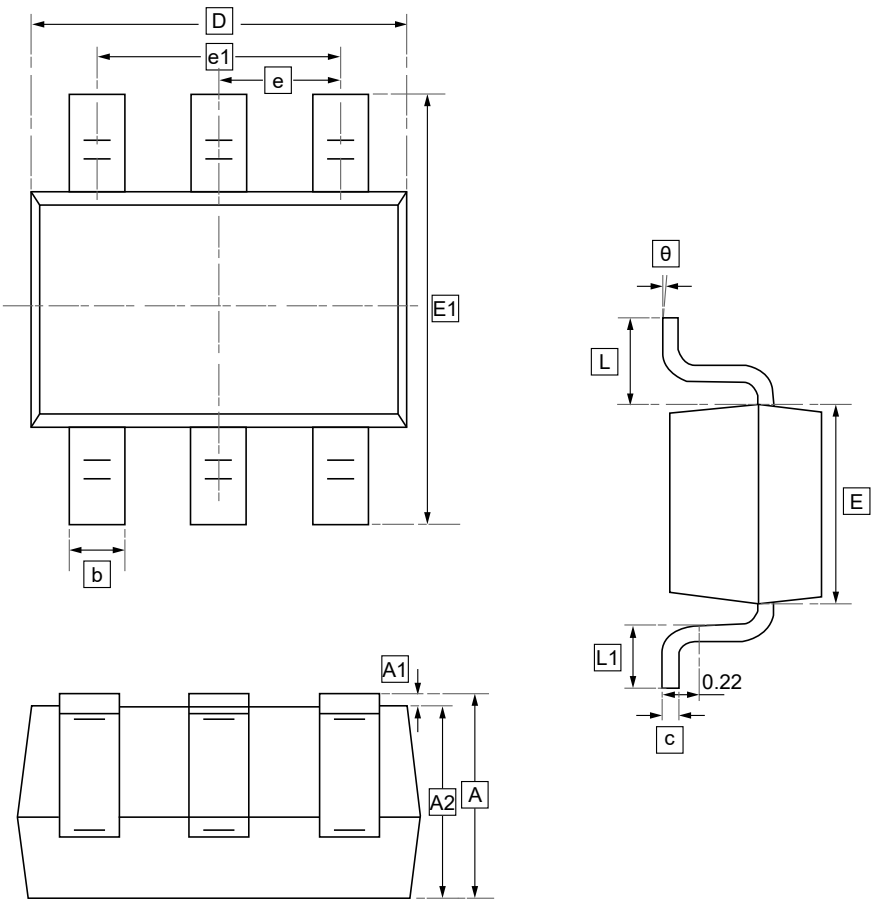


DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	b	c	D	E	E1	e	e1	L	L1
Min	0.900	0.000	0.900	0.150	0.080	2.000	1.150	2.150	0.65	1.200	0.525	0.260
Max	1.100	0.100	1.000	0.350	0.150	2.200	1.350	2.450	TYP	1.400	REF	0.460

Symbol	θ
Min	0°
Max	8°



8.Ordering information



ww: Batch Code

Order Code	Package	Base QTY	Delivery Mode
UMW RCLAMP0504F	SOT-363	3000	Tape and reel



9.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.