


1. Description

The UMW MAX232 have two drives and two receivers. The drivers and receivers meet all EIA/TIA-232 and CCITT V.28 specifications at data rates up to 120kbps when loaded in accordance with the EIA/TIA-232 specification.

2. Features


- Operate from Single +5 V Power Supply
- Guaranteed 120 kbps Data Rate
- Latchup Free
- ESD Protection $\pm 2\text{kV}$

3. Typical Operating Circuit

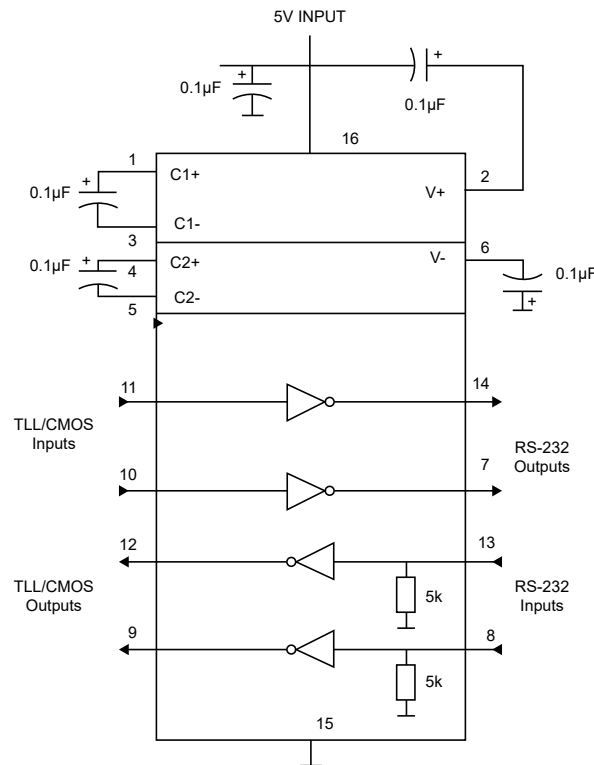



4. Pinning Information

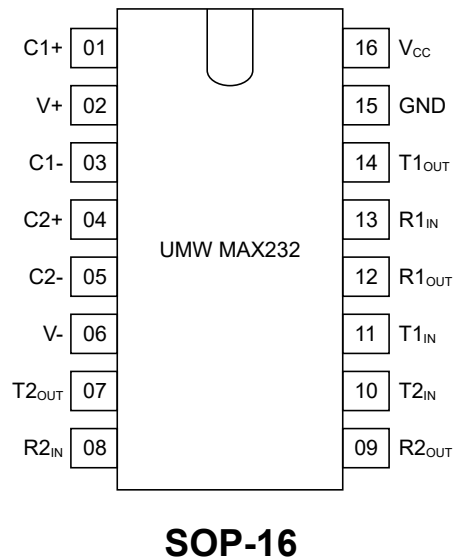

Pin No	Symbol	Function
01	C1+	Terminal for positive charge-pump capacitor
02	V+	+2 V _{CC} voltage generated by the charge-pump
03	C1-	Terminal for positive charge-pump capacitor
04	C2+	Terminal for negative charge-pump capacitor
05	C2-	Terminal for negative charge-pump capacitor
06	V-	-2 V _{CC} voltage generated by the charge-pump
07	T2 _{OUT}	RS-232 Driver Output
08	R2 _{IN}	RS-232 Receiver Input
09	R2 _{OUT}	RS-232 Receiver Output
10	T2 _{IN}	RS-232 Driver Input
11	T1 _{IN}	RS-232 Driver Input
12	R1 _{OUT}	RS-232 Receiver Output
13	R1 _{IN}	RS-232 Receiver Input
14	T1 _{OUT}	RS-232 Driver Output
15	GND	Ground
16	V _{CC}	+ 4.5 V to 5.5 V Supply Voltage Input



5. Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Units
Supply voltage	V_{CC}	-0.3	6	V
Transmitter high output voltage	V_{+}	$V_{CC}-0.3$	14	
Transmitter low output voltage	V_{-}	-14	+0.3	
Transmitter input voltage	V_{TIN}	-0.3	$V_{CC}+0.3$	
Receiver input voltage	V_{RIN}	-30	30	
Output voltages (transmitters)	V_{TOUT}	$V_{-}-0.3$	$V_{+}+0.3$	
Output voltages (receivers)	V_{ROUT}	-0.3	$V_{CC}+0.3$	
Power dissipation	P_D	-	-	mW
DIP - package (derate 10.53 mw/c above 70°C)		-	842	
So-package (derate 9.52 mW/C above 70°C)		-	762	
Short-Circuit Duration (T_{OUT})	I_{SC}	-	Continuous	
Storage temperature	T_{STG}	-60	150	°C
MAX2__AC__, MAX2__C/D		0	70	°C
MAX2__AE__, MAX2__I		-40	85	°C



6. Electrical Characteristics

$V_{CC}=4.5V$ to $5.5V$, $C1-C4 = 0.1\mu F$; $T_A = -40$ to $+85^\circ C$ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Max	Units
DC CHARACTERISTICS					
Operating Voltage Range	V_{CC}	$V_{IL}=0V$	4.5	5.5	V
V_{CC} Supply Current	I_{CC}	No load, $T_A = 25^\circ C$		10	mA
LOGIC					
Input Leakage Current	I_i	$T_{IN}=0V$ to V_{CC}	0.2	± 10	μA
Input Threshold Low	V_{IL}	T_{IN}		0.8	V
Input Threshold High	V_{IH}	T_{IN}	2		V
Output Voltage Low	V_{OL}	R_{OUT} , $I_{OUT}=3.2mA$		0.4	V
Output Voltage High	V_{OH}	R_{OUT} , $I_{OUT}=-1mA$	3.5		V
RECEIVER INPUTS					
Input Voltage Range	V_{RIN}	All parts, normal operation	-30	30	V
Input Threshold Low	V_{ff}	$T_A=+25^\circ C$, $V_{CC}=5V$	0.8		V
Input Threshold High	V_{on}	$T_A=+25^\circ C$, $V_{CC}=5V$		2.4	V
Input Hysteresis	V_h	$V_{CC}=5V$	0.2	1	V
Input Resistance	R_i	$T_A=+25^\circ C$, $V_{CC}=5V$	3	7	k Ω
TRANSMITTER OUTPUTS					
Output Voltage Swing	ΔV_O	All driver inputs loaded with 3k Ω to ground	± 5		V
Output resistance	R_O	$V_{CC}=V+=V-=0V$, $V_{OUT}=+2V$	300		Ω
Output Short - Circuit Current	I_{SC}			± 60	mA



Parameter	Symbol	Conditions	Min	Max	Units
TIMING CHARACTERISTICS					
Maximum Data Rate	ST	$R_L=3k\Omega$ to 7 k Ω $C_L=50pF$ to 1000pF onetransmitter switcing	120		kbps
Reseiver Propagation Delay	t_{PLHR} t_{PHLR}	$C_L=150pF$ All parts, normal operation(Fig. 1)		10	μS
Transmitter Propagation Delay	t_{PLHT} t_{PHLT}	$R_L=3k\Omega$, $C_L=2500pF$ all transmitters loaded (Fig.2)		6	μS
Transition-Region Slew Rate	SR	$T_A=25^\circ C$, $V_{CC}=5V$ $R_L=3k\Omega$ to 7 k Ω $C_L=50pF$ to 2500pF measured from $-3V$ to +3V or +3V to -3V(Fig.3)	3	30	V/ μS



7. Timing Diagram

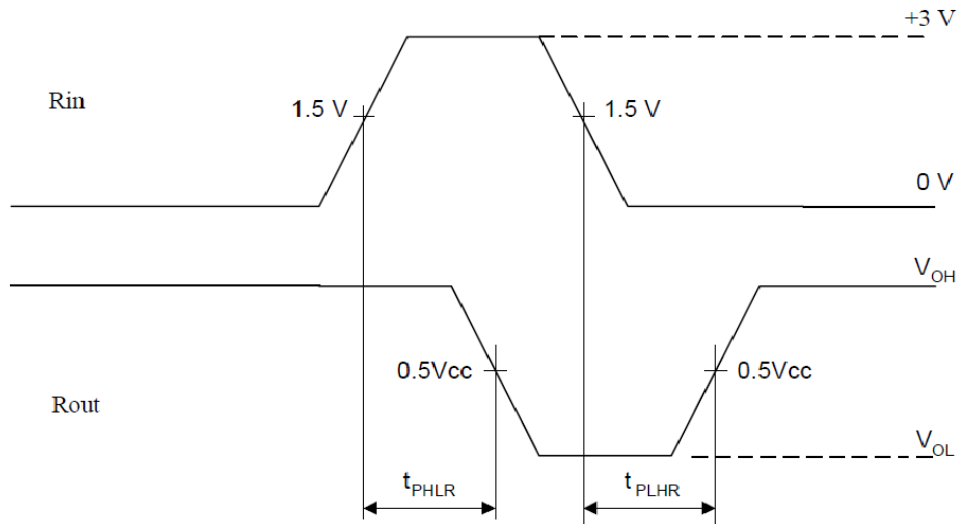


Figure 1

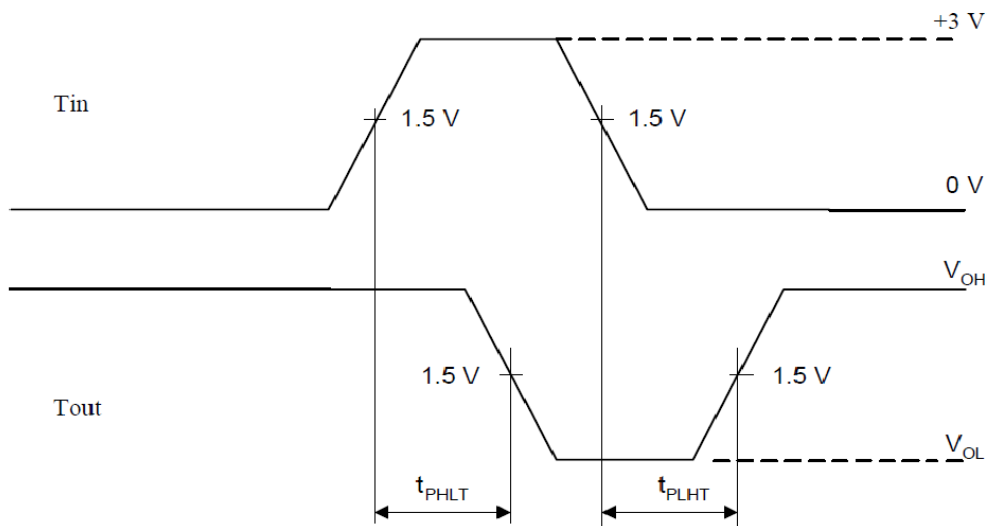


Figure 2


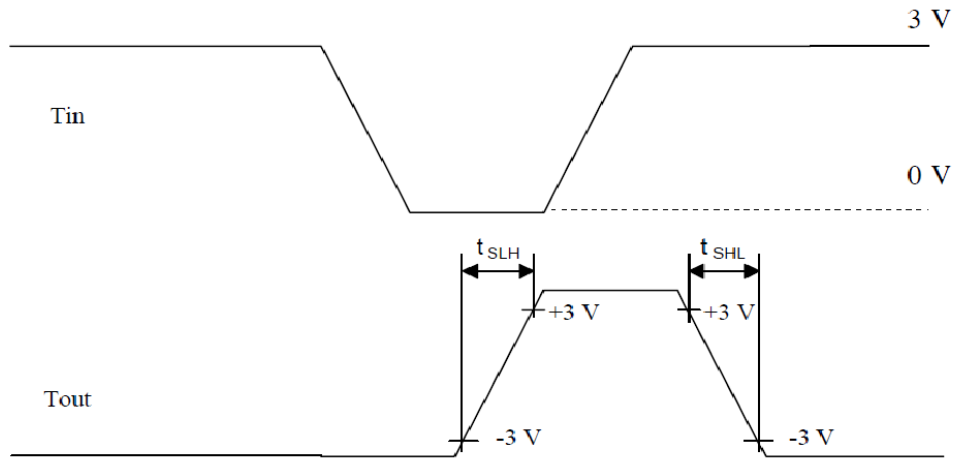


Figure 3



8.1 SOP-16 Package Outline Dimensions

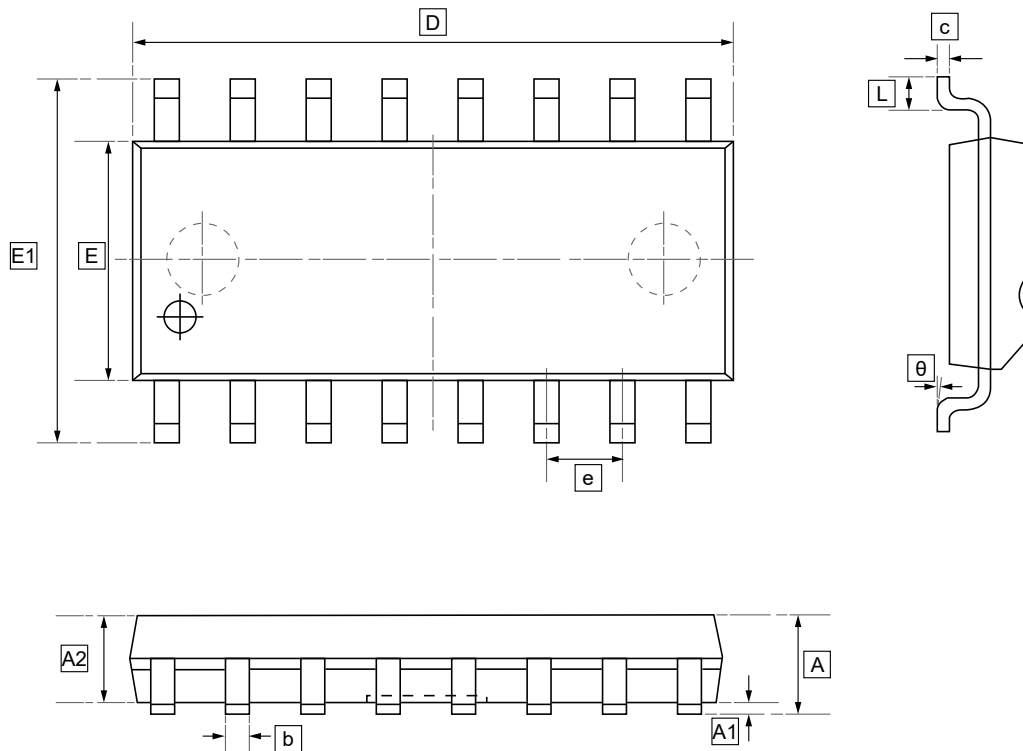


DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	b	c	D	E	E1	e	L	θ
Min	1.350	0	1.350	0.330	0.170	9.800	3.800	5.800	1.270	0.400	0°
Max	1.750	0.100	1.550	0.510	0.250	10.200	4.000	6.200	BSC	1.270	8°



8.2 TSSOP-16 Package Outline Dimensions

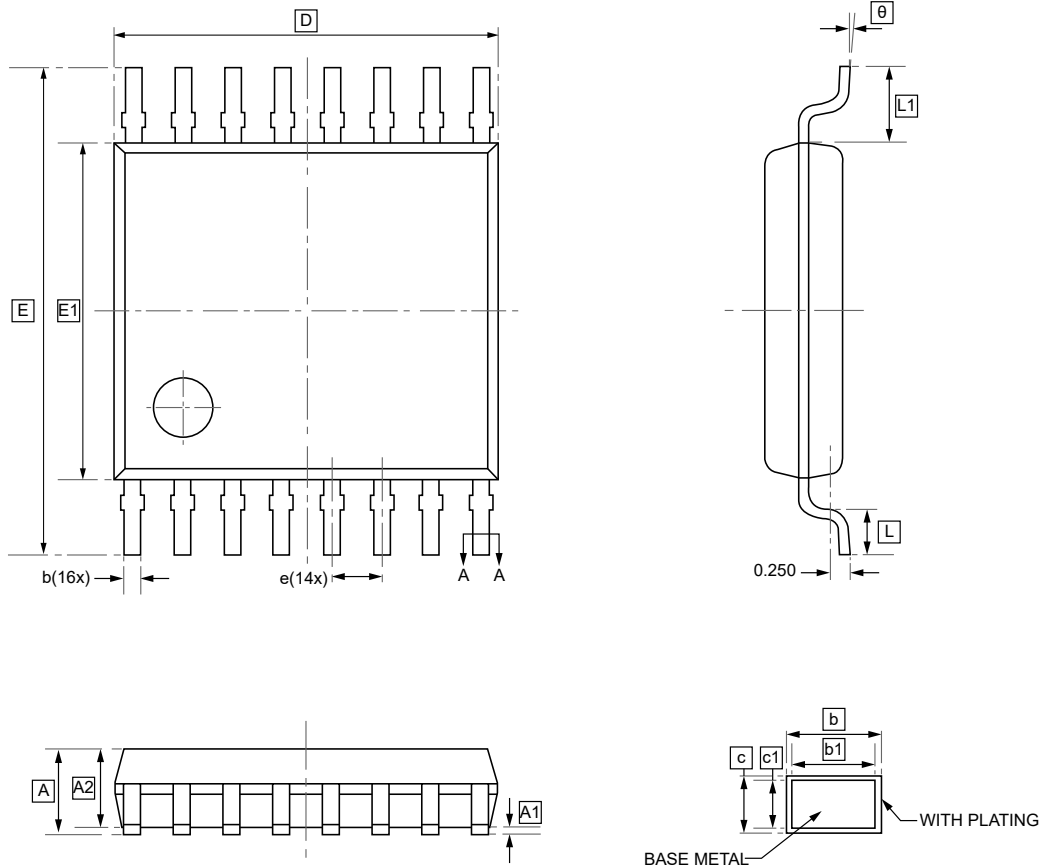


DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	b	b1	c	c1	D	E	E1	e	L1
Min	-	0.05	0.90	0.20	0.19	0.13	0.120	4.90	6.20	4.30	0.65	0.85
Max	1.20	0.15	1.05	0.28	0.25	0.17	0.14	5.10	6.60	4.50	BSC	1.15

Symbol	L	θ
Min	0.45	0°
Max	0.75	8°



9. Ordering information



yww: Batch Code

Order Code	Marking	Package	Base QTY	Delivery Mode
UMW MAX232ACSE	MAX232 ACSE	SOP-16	2500	Tape and reel
UMW MAX232CSE	MAX232 CSE	SOP-16	2500	Tape and reel
UMW MAX232D	MAX232 D	SOP-16	2500	Tape and reel
UMW MAX232DR	MAX232 DR	SOP-16	2500	Tape and reel
UMW MAX232IDR	MAX232 IDR	SOP-16	2500	Tape and reel
UMW MAX232AEUE	MAX232A EUE	TSSOP-16	4000	Tape and reel



10. Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.