

1.Features

The PESDxxVL1BA is Transient Voltage Suppressor that designed to protect components which are connected to data and transmission lines against electrostatic discharge (ESD), electrical fast transient (EFT) and lightning. All pins are rated to withstand 30kV ESD pulses using the IEC61000-4-2 air discharge method.

3.Applications


- Portable electronic
- Control & monitoring systems
- Servers, notebooks, and desktop PCs

2.Features

- IEC 61000 -4-2 Level 4 ESD Protection
- - $\pm 30\text{kV}$ Contact Discharge
- - $\pm 30\text{kV}$ Air Discharge
- 350W Peak pulse Power (8/20us)
- Low clamping voltage
- Low leakage current
- RoHS complia nt
- Protecting one bi -directional lines
- Working voltage: 12/15/24/36V

- Set-top box
- Communications systems
- Cellular handsets and accessories

4.Pinning information

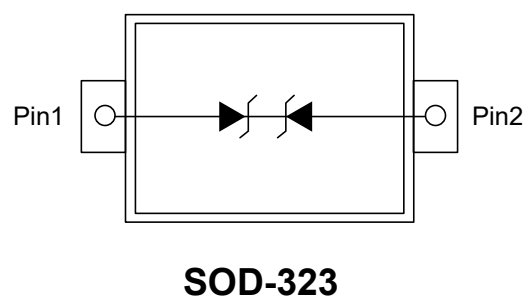



5. Absolute Maximum Ratings $T_A = 25^\circ\text{C}$

Parameter	Symbol	Maximum	Units
Peak pulse power ($t_p=8/20\mu\text{s}$)@ 25°C	P_{PK}	350	W
Peak pulse current ($t_p=8/20\mu\text{s}$)@ 25°C	I_{PP}	Refer to Table-5	A
ESD(IEC61000-4-2 air discharge) @ 25°C	V_{ESD}	± 30	kV
ESD(IEC61000-4-2 contact discharge) @ 25°C		± 30	kV
Junction temperature	T_J	150	$^\circ\text{C}$
Operating temperature	T_{OP}	125	$^\circ\text{C}$
Storage temperature	T_{STG}	150	$^\circ\text{C}$
Lead temperature	T_L	260	$^\circ\text{C}$

Notes: Table-3 Absolute Maximum rating



6. Electrical Characteristic

Symbol	Description
V_{RWM}	Rated reverse stand-off voltage
V_{BR}	Minimum breakdown voltage @ $I_T=1mA$
V_{CL}	Typical Clamping voltage
I_{PP}	Maximum peak pulse current
I_R	Reverse leakage current @ V_{RWM}
C_O	Typical line capacitance ($V_{IO}=0V, V_{P-P}=30mV, f=1MHz$)

Notes: Table-4 Parameters Description


7. Electrical Parameters ($T_A=25^{\circ}C$ unless otherwise noted)

Part Number	V_{RWM}	V_{BR}	$V_{CL}@I=1A$	I_{PP}	$V_{CL}@I=I_{PP}$	I_R	C_O
	(V)	(V)	(V)	(A)	(V)	(uA)	(pF)
PESD12VL1BA	12	13.3	20	12	37	1	70
PESD15VL1BA	15	16.5	25	9	55	1	40
PESD24VL1BA	24	26	40	6	63	1	30
PESD36VL1BA	36	38	55	4	72	1	25


Notes: Table-5 Electrical Characteristics for All Series



8. Typical characteristic

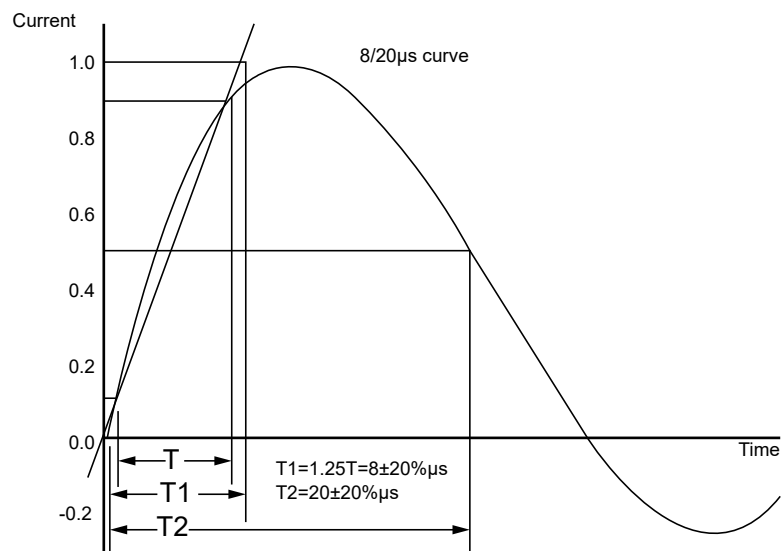


9. Typical Application

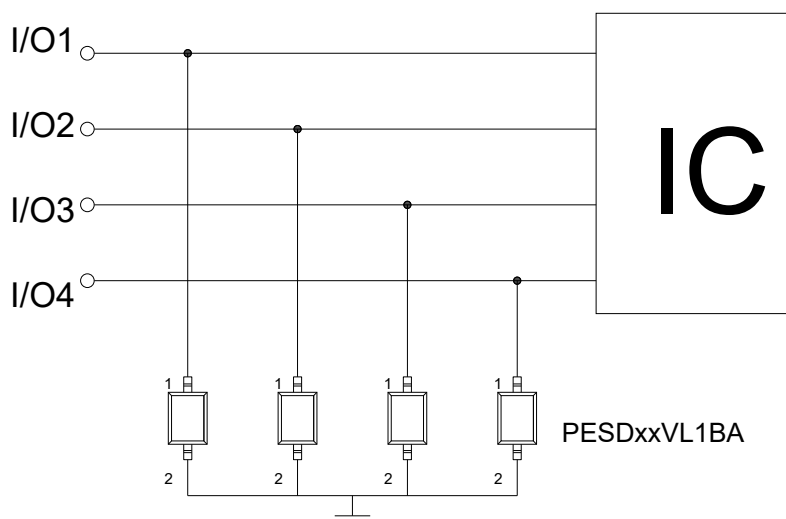



10.SOD-323 Package Outline Dimensions

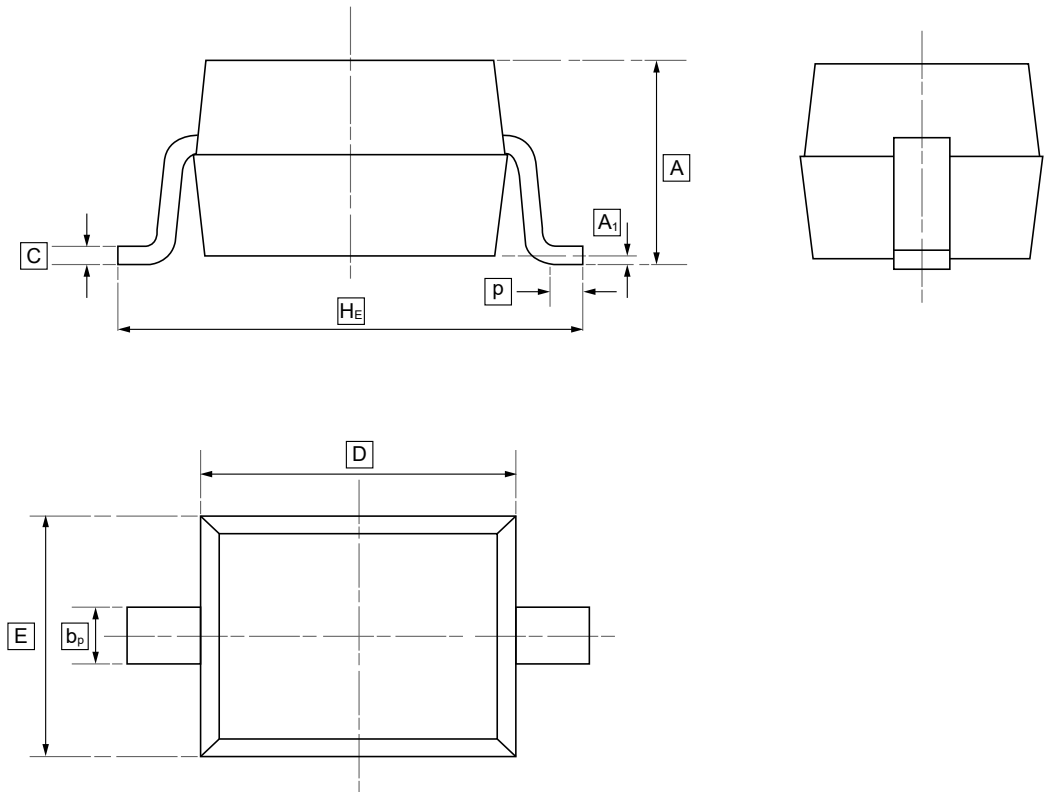


DIMENSIONS (mm are the original dimensions)

Symbol	A	b _p	C	D	E	H _E	A ₁	P
Min	0.90	0.25	0.10	1.60	1.15	2.30	0.01	0.20
Max	1.20	0.40	0.15	1.80	1.35	2.80	0.10	0.50



11.Ordering information

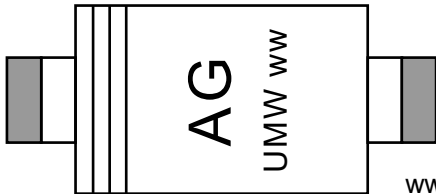

ww: Batch Code

Order Code	Marking	Package	Base QTY	Delivery Mode
UMW PESD12VL1BA	AD	SOD-323	3000	Tape and reel
UMW PESD15VL1BA	AE	SOD-323	3000	Tape and reel
UMW PESD24VL1BA	AF	SOD-323	3000	Tape and reel
UMW PESD36VL1BA	AG	SOD-323	3000	Tape and reel



12.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.